# City of Albany



TO: ALBANY PLANNING & ZONING COMMISSION

FROM: ANNE HERSCH, AICP, CITY PLANNER

**SUBJECT:** PA 12-042 Design Review 1036 Kains Avenue

DATE: October 10, 2012

Property Owner:	Applicant/Representative:
Ming Lu Kao	Y.M. Chung
2267 Cedar St.	2416 Doidge
Berkeley, CA	Pinole, CA 94564

PROJECT: 1036 Kains Design Review

FILE: PA 12-042 LOCATION: 1036 Kains

GP LU: High Density Residential (35-63

units/acre, Avg. 39 du/acre)

**ZONING:** R-3 Residential High Density

PLANNER: Anne Hersch Original filing: August 15, 2012

Date Deemed Complete: August 31, 2012 Date of Notice Posted/Mailed: 9/28/2012 Date of Public Hearing: October 10, 2012 Total number of days to hearing: 55 days

#### **REQUEST**

The applicant is seeking design review approval to convert an existing single family home into a duplex which will contain two (2) units with three bedroom/two and a half bath at 1036 Kains Ave. The existing home has two bedrooms and one bath and is 2,219 sq. ft. on a 5,000 sq. ft. lot. The subject property is zoned R-3, "Residential High Density" which allows for more than one unit on the property. The applicant is proposing to lift the existing home and convert the ground floor to habitable space. Both units will have two levels. The building height is proposed to be 27'6". Four off-street parking spaces are provided, two tandem spaces for each dwelling unit.

#### STAFF RECOMMENDATION

Staff recommends that the Planning and Zoning Commission review the proposed Design Review request for 1036 Kains Avenue and approve the project subject to attached findings and project conditions.

#### **SITE LOCATION**



Figure 1. Site Location

## **BACKGROUND/PROJECT DESCRIPTION**

The subject property is zoned R-3. The lot is 5,000 sq. ft. with an existing 2,219 sq. ft. single-story home. The existing single family home has a lower basement level with ceiling height around 7 feet, though the space is not finished. The applicant is proposing to elevate the house approximately five feet higher to accommodate a habitable lower level and divide the building into two apartment units. The lower level is approximately 100 sq. ft. in area and will be renovated to accommodate living space. One unit will face the street frontage and the other unit will face the rear yard.

#### **ANALYSIS**

The applicant is proposing to add a two story rear yard addition approximately 945 sq. ft. A 40 sq. ft. addition is proposed for the northeast corner of the house. A two level 130 sq. ft. addition is proposed at southeast corner of the home. A stair case addition approximately 98 sq. ft. is proposed for the south elevation.

Front Unit			
	First Floor	818 sq. ft.	
	Second Floor	777 sq. ft.	
	Total	1,535 sq. ft.	
Second			
Unit			
	First Floor	845 sq. ft.	
	Second Floor	793 sq. ft.	
	Total	1,738 sq. ft.	

**Table 1.** Proposed Unit Size

#### **Exterior Elevations**

The existing single story home is 2,219 sq. ft. The proposed multi-family home is 3,233 sq. ft. The applicant is proposing to elevate the house 5 feet to accommodate a habitable lower level and divide the building into two-unit apartments. There will be one apartment facing the street and a rear unit facing the rear yard, each with a private internal stair and balconies. In each unit, the ground floor will include a new dining room, kitchen, living room, entry foyer, covered entry porch, one half bathroom, laundry, closet, and furnace. The second floor will contain three bedrooms and two bathrooms.

The current home is Folk Victorian. The proposed plans indicate a contemporary appearance. The roof over the main structure is hipped. Decorative beam details under the main roofline are proposed on all four elevations. Three (3) front gable roof details are proposed for the south elevation, one over each second story balcony and one over the internal staircase. Windows on the east, west, and south elevations are proposed to be vertical and provide a great deal of natural light to both the levels of the home. The maximum building height is proposed to be 27'6". The existing exterior wood details are proposed to remain, except the siding is proposed to be changed to stucco. The proposed windows are Milgard Classic Series Vinyl windows.



Photo 1: Street view (east) of 1036 Kains Avenue



Photo 2: Side view (South) of 1036 Kains Avenue

#### Residential Design Guidelines

Below is a brief overview of consistency with the City's Residential Design Guidelines.

- 1. The front yard is the house's contribution to the street.
  - The front yard is proposed to remain the same. However, staff is recommending that a landscape plan be provided as part of the building permit submittal.
- 2. Every house needs a usable front porch
  - A porch will be located on the southeast elevation.
- 3. Garages should have single-car doors and be attractive
  - N/A
- 4. Increasing the livability of the home
  - The home will increase in area from 2,219 sq. ft. (2 bedroom, 1 bath) to 3,233 sq. ft. duplex contain two 3 bedroom, 2 bath units.
- 5. Dormers and bays are encouraged
  - N/A
- 6. Trim and details give a house warmth and character
  - There are decorative redwood elements on the trim.
- 7. Building Materials
  - The home will be stucco with redwood trim.
- 8. Green Building
  - The applicant has provided the supplemental application form detailing the "green" efforts to be made as part of the project construction. This includes salvaging reusable building materials, remodel for mixed use, adaptive reuse and historic preservation, convert gas to tankless water heater, install compact fluorescent light bulbs (CFLs), install energy-efficient windows (double-paned, low-emissivity, and low conductivity frames), and install sealed furnaces and water heaters. The Checklist provided by the applicant indicates a total score of 79 points.
- 9. Second-Units and Multi-family housing
  - The proposed single-family home is proposed to be converted into a multi-family duplex with a proposed 1,535 sq. ft. front unit and a 1,738 sq. ft. rear unit.
- 10. Landscaping is an important aesthetic element of home design
  - The landscaping is proposed to remain the same with individual gardens for each dwelling unit.

#### Parking

Four off-street parking units are proposed, two in tandem for each dwelling unit. The existing parking dimension of enclosed space is  $12' \times 18'$  and is proposed to increase to  $16' \times 36'$ . The narrowest width of the existing driveway is 10' and is proposed to decrease to 9'.

#### **ENVIRONMENTAL REVIEW**

Staff has determined that the proposed project is categorically exempt from the requirements of the California Environmental Quality Act (CEQA) per Section 15303 "New Construction or Conversion of Small Structures" of the CEQA Guidelines, which exempts small additions.

# **ATTACHMENTS:**

- 1. Analysis of Zoning Requirements
- Draft Findings for Approval
   Draft Conditions of Approval
- 4. Project Plans & Application

## ATTACHMENT 1 - ANALYSIS OF COMPLIANCE WITH ZONING REQUIREMENTS

## 20.12 Zoning Districts and Permitted Uses

General Plan: High Density Residential
Zoning: R-3 – Multi-Family Residential

## 20.16 Land Use Classifications

Single family residential

Surrounding North - SFR East — SFR
Property Use South - SFR West — SFR

# 20.20.080 Secondary Residential Units.

Not applicable.

# 20.24.020 Table of Site Regulations by District.

	Existing (approx.)	Proposed Construction (approx.)	Requirement
Setbacks			
Front (east)	14'9.5"	15'	15'
Side (south)	21'4"	1 <i>5</i> '8"	5'
Side (north)	6'7"	5'	5'
Rear (west)	29'	16'8"	15'
Area			
Lot Size	5,000	No change	
Lot Coverage	27%	37%	50%
(rear yard only)			
Maximum Height	22'6.5"	27'6"	35' max.

20.24.030 Overlay District Regulations. Not applicable.

20.24.040 Hillside Residential Regulations. Not applicable

#### 20.24.050 Floor-Area-Ratio.

	Existing (approx.)	Proposed	Requirement
Lot Size	5,000	No change	
Floor Area	44%	65%	
Garage/Storage	N/A	No change	
Main Level	1156	No change	
Second-floor		823	
Total	1479	2302	
Total Counted*	1259	2022	
Floor Area Ratio*	34%	53.9%	1.5

<sup>\* 220</sup> sq. ft. exempted from "total counted" as permitted by MC 20.24.050 for garage and stairs.

20.24.060 Setback Areas, Encroachments. Not applicable.

20.24.100 Distances between Structures. See Analysis.

20.24.110 Fences, Landscaping, Screening. Not applicable.

20.24.130 Accessory Buildings. See Analysis.

20.28 Off-Street Parking Requirement. See Analysis.

20.40 Housing Provisions Not applicable.

<u>20.44 Non-conforming Uses, Structures and Lot</u> Not applicable.

20.48 Removal of Trees Not applicable.

20.52 Flood Damage Prevention Regulations Not applicable.

20.100.030 Use Permits. Not applicable.

# 20.100.040 Variances.

Not applicable.

# 20.100.010 Common Permit Procedures.

Public notice of this application was mailed on September 28, 2012, in the form of mailed notice, to property owners and occupants within a 100-foot radius, and posted in one location.

20.100.050 Design Review. See Analysis.

# **ATTACHMENT 2 – FINDINGS**

Findings for Design Review Approval (Per section 20.100.050.E of the AMC)

Requir	ed Finding	Explanation
1.	The project conforms to the General Plan, any applicable specific plan, applicable design guidelines adopted by the City of Albany, and all applicable provisions of this Chapter.	The General Plan designates this area for residential development. Additionally, the project meets City zoning standards for location, intensity and type of development.
2.	Approval of project design is consistent with the purpose and intent of this section, which states "designs of projectswill result in improvements that are visually and functionally appropriate to their site conditions and harmonious with their surroundings, including natural landforms and vegetation. Additional purposes of design review include (but are not limited to): that retention and maintenance of existing buildings and landscape features are considered; and that site access and vehicular parking are sufficient."	The proposal is in scale and harmony with existing development in the vicinity of the site. The project will not require grading or excavation. The project will not create a visual detriment at the site or the neighborhood.  The proposed addition is attractive in appearance, and is in scale with the surrounding neighbors. The design is complementary with the existing home.
3.	Approval of the project is in the interest of public health, safety and general welfare.	The proposed project will not be detrimental to the health, safety, convenience and welfare of those in the area and would not adversely impact property, improvements or potential future development in the area.
4.	The project is in substantial compliance with applicable general and specific Standards for Review stated in Subsection 20.100.050.D.	The project as designed is in substantial compliance with the standards as stated, including harmonious materials, and well proportioned massing .

#### **ATTACHMENT 3**

# **COMMUNITY DEVELOPMENT DEPARTMENT CONDITIONS OF APPROVAL**

#### **SPECIAL CONDITIONS**

SPECIAL 1 The applicant shall submit a landscape plan at the time of building permit submittal.

#### **GENERAL PROJECT CONDITIONS**

- Gen-1 **Project Approval**. This Design Review approval is for 1036 Kains, as substantially shown and described on the project plans, except as may be modified by conditions herein. Plans prepared by Y. Ming Chung, date received August 15, 2012, as presented to the Planning and Zoning Commission on October 10, 2012. For any condition herein that requires preparation of a Final Plan where the project developer has submitted a conceptual plan, the project developer shall submit final plan(s) in substantial conformance with the conceptual plan, but incorporate the modifications required by the conditions herein for approval by the City.
- Project Approval Expiration. This Design Review approval will expire on October 24, 2013 (one year from the date on which this approval becomes effective) or at an alternate time specified as a condition of approval, unless a building permit has been issued and construction diligently pursued. The approval may be renewed by the Community Development Director for a period up to an additional two (2) years, provided that, at least ten (10) days before expiration of one (1) year from the date when the approval becomes effective, an application for renewal of the approval is filed with the Community Development Department. The Community Development Director may grant a renewal of an approval where there is no change in the original application, or there is no request to change any condition of approval.
- Gen-3 Fees. The applicant shall pay any and all City and other related fees applicable to the property, as may be modified by conditions herein. Fees shall be based on the current fee structure in effect at the time the relevant permits are secured, and shall be paid before issuance of said permit or before any City Council final action approval. Notice shall be taken specifically of Plan Check, Engineering, Fire and Inspection Fees. The project developer shall also reimburse the City for direct costs of planning; building and engineering plan check and inspection, as mutually agreed between the City and developer.
- Appeals. The Albany Municipal Code provides that any action of the Planning staff may be appealed to the Planning and Zoning Commission, and any action of the Planning and Zoning Commission may be appealed to the City Council as per the procedures described in Section 20.100.080. The City Clerk will then schedule the matter for the next available City Council meeting.

- GEN-5

  Requirement for Building Permit. Approval granted by the Planning and Zoning Commission does not constitute a building permit or authorization to begin any construction or demolish an existing structure. An appropriate permit issued by the Community Development Department must be obtained before constructing, enlarging, moving, converting, or demolishing any building or structure within the City.
- GEN-6 **Fire Department Approval**. As part of a building permit application, the applicant shall submit written documentation that all requirements of the Albany Fire Department have, or will be, met to the satisfaction of the AFD.
- GEN-7 **Engineering Approval**. As part of a building permit application, the applicant shall submit written documentation that all requirements of the Public Works Department have, or will be, met to the satisfaction of the City Engineer.
- GEN-8 Construction Hours. Construction activity shall be restricted to the hours of 8:00 a.m. to 6:00 p.m. Mondays through Saturdays, and 10:00 a.m. to 6:00 p.m., Sundays and legal holidays, unless otherwise approved in writing by the City Engineer for general construction activity. Failure to comply with construction hours may result in stop work orders or other administrative actions.
- Archeological Remains. In the event subsurface archeological remains are discovered during any construction or preconstruction activities on the site, all land alteration work within 100 feet of the find shall be halted, the Community Development Department notified, and a professional archeologist, certified by the Society of California Archeology and/or the Society of Professional Archeology, shall be notified. Site work in this area shall not occur until the archeologist has had an opportunity to evaluate the significance of the find and to outline appropriate mitigation measures, if deemed necessary. If prehistoric archeological deposits are discovered during development of the site, local Native American organizations shall be consulted and involved in making resource management decisions.
- Modifications to Approved Plans. The project shall be constructed as approved. Planning staff may approve minor modifications in the project design, but not the permitted land use (per MC 20.12). A change in an item requiring discretionary approval and any other changes deemed appropriate by the Planning staff shall require further Planning and Zoning Commission approval through the Design Review process.
- Hold Harmless Agreement. Pursuant to Government Code Section 66474.9, the applicant (including any agent thereof) shall defend, indemnify, and hold harmless, the City of Albany and its agents, officers and employees, from any claim, action, or proceeding against the City or its agents, officers or employees to attack, set aside, void, or annul the City's approval concerning this application, which action is brought within the time period provide for in Section 66499.37. The City will promptly notify the applicant of any such claim action or proceeding and cooperate fully in the defense.

- GEN-12 **Public Improvements Standards.** Public improvements shall be designed and constructed in accordance with the City's Standard Specifications and Standard Details, unless specifically waived in writing by the City Engineer.
- GEN-13 **Title 24 Standards.** All construction shall be designed and built in accordance with California Title 24 handicap accessibility standards. Appropriate details and specifications shall be incorporated into the plans and submitted at time of building permit application.
- GEN-14 **Energy Conservation Standards.** All buildings shall be designed in accordance with the State of California energy conservation standards for non-residential buildings. The necessary plans and documentation shall be submitted at time of building permit application.

#### **ARCHITECTURE CONDITION**

- ARCH-1 **Material Samples.** Descriptions or samples of final exterior materials and the proposed color palette shall be submitted for review and approval by the Community Development Department as part of building permit application.
- ARCH-2 **Final Architectural Drawings.** The applicant shall submit final architectural elevations, details and revisions for the review and approval of the Community Development Department as part of building permit application.
- ARCH-3 **Window Recess.** All new windows shall be recessed two inches from face of building to provide adequate shade and shadow and to promote visual relief. Final window details shall be submitted for review and approval at the time of building permit application.
- ARCH-4 **Non-Reflective Glazing.** Any glazing material shall be non-reflective.

#### LIGHTING CONDITIONS

- Exterior Lighting. All exterior lighting shall be installed in such a manner that glare is directed away from surrounding properties and rights-of-way. If required, exterior light fixtures shall be equipped with "cut off" lenses to minimize light and glare spill over onto adjacent properties.
- Shielding of Lighting. Prior to the certificate of occupancy, all accent lighting shall be directed downward and, if necessary, fixed with cut-off lenses to ensure that no glare spills onto neighboring properties.

#### **LANDSCAPING CONDITIONS**

LNDSC-1 **Street Tree Requirement.** The applicant shall apply for one street tree before the issuance of the building permit. The City's Environmental Resource Assistance will

determine the type and location of the tree and may waive this requirement if site conditions will not reasonably support establishment of a new tree.

## **PUBLIC WORKS DEPARTMENT CONDITIONS**

#### **GENERAL ENGINEERING CONDITIONS**

- ENGR-1 **Title Report.** n/a.
- Geo-Technical Report. The applicant shall submit, as part of a building permit application, a geotechnical investigation report prepared by a California certified engineering geologist and geotechnical engineer, if determined necessary by the City Engineer. The investigation shall specifically address any hazards of surface fault rupture in accordance with the Alquist-Priolo Special Study Zones Act. Any mitigation measures or conditions requiring further review noted during the Planning process shall be fully addressed prior to plan check.
- ENGR-3 **Backflow Device.** Any required water service for fire protection purposes shall be equipped with a City approved backflow device. Services for irrigation purposes also require a separate City approved backflow prevention device.

#### **GRADING CONDITIONS**

- GRAD-1 **Grading Permit.** Any grading required in association with the project shall require a grading permit from the Community Development Department. To obtain this permit, the applicant shall submit a grading plan, indicating the extent and volumes of earth proposed to be moved. A grading permit is subject to 2001 California Building, Appendix 33.
- GRAD-2 **Demolition Permit.** Site demolition shall not occur until construction permits are issued for the development project. All demolition shall be in accordance with permits issued by the City and Bay Area Air Quality Management District (BAAQMD).
- Water on Site. The site shall be graded so as to prevent rainfall runoff originating from improved areas on the project site from crossing onto adjoining private property. Building floor elevations shall be above the FEMA-mapped 100-year flood plain as established by a licensed civil engineer. Provide the elevation and compaction certificates during and upon the completion of grading required by the Uniform Building Code and in conformance with the recommendations of the geotechnical engineer's report. Shore and dewater all excavations in accordance with the requirements of the geotechnical engineer's report.
- GRAD-4 Flooding Damages. The project developer shall execute an assumption of risk, indemnification and hold harmless agreement as required by the City. The agreement, in substance, shall state that the project developer, and any successor in interest, shall assume all risk for damages to the project and to project

improvements, flooding caused by surface water intrusion, stormwater runoff, or water under the ground surface pressing on or flowing or seeping through foundations, walls, floors, or paved surfaces, basements, whether paved or not, or windows, doors or other openings, and shall indemnify and hold the City harmless from any claims of such damages, including third-party claims, of such damage or of such damages or of damages arising from rainfall runoff which is not prevented from leaving the project site in violation of Condition GRAD-3.

- GRAD-5 **Dust Control Program**. A dust control program shall be prepared by the project developer and approved by the Community Development Department and City Engineer before issuance of a grading permit. The dust control plan shall address such items as covering stockpiled material, frequent watering of graded areas, revegetating graded areas, speed limits for grading equipment and similar items.
- Stormwater Pollution Prevention Plan. The project developer shall submit a Stormwater Pollution Prevention Plan (SWPPP) for review by the City before the issuance of a building or grading and/or building permit. The SWPPP shall be consistent with standards adopted by the Regional Water Quality Control Board and the City of Albany Clean Water Program and implemented by the project general contractor, all subcontractors and suppliers of material and equipment. Construction site cleanup and control of construction shall also be addressed in the SWPPP. The project developer shall be responsible for SWPPP compliance. A copy of the SWPPP shall be kept at the construction site at all times.

#### INFRASTRUCTURE CONDITIONS

- INFR-1 **Sewer System Requirements.** The sewer system for the subject building shall comply with Chapter 15 of the Albany Municipal Code and to the satisfaction of the City Engineer before Final Inspection approval of the construction permit.
- Two-Way Cleanout. Installation of a two-way curbside cleanout shall be required per Chapter 15 of the Albany City Code. This applies to all properties, including properties with a valid upper sewer lateral certificate of compliance. All 2-way curbside clean outs shall be fitted with a loose cap in accordance with the City's standard detail SS6.
- Property Run-off Requirements. All runoff from impervious surfaces shall be intercepted at the project boundary and shall be collected and conducted via an approved drainage system through the project site to an approved storm drain facility, as determined by the City Engineer. Development that contributes additional water to the existing drainage system shall be required to complete a hydraulic study and make improvements to the system as required to accommodate the expected ultimate peak water flow and to stabilize erosive banks that could be impacted by additional storm water flow.
- Roof Drainage. Roof drainage from the structure shall be collected via a closed pipe and conveyed to an approved storm drain system off the street curb. No concentrated drainage of surface flow across sidewalks shall be permitted.

Alternative natural treatment measures are subject review and approval by the City Engineer.

- Hydraulic Calculations. The applicant shall submit hydraulic calculations, prepared by a California licensed civil engineer, necessary to determine if the existing water and sewer mains that serve this lot have available capacity for the addition of the proposed development. If capacity is not available, sewer and water mains of adequate size shall be designed and secured prior to issuance of building permits and constructed in a manner acceptable to the City Engineer prior to occupancy release, unless determined otherwise by the City Engineer.
- Completion of Off-Site Improvements. Off-site improvements, as required by the City Engineer, shall be complete before issuance of a Certificate of Occupancy unless alternatives are approved in writing by the Albany City Engineer.

#### **PUBLIC IMPROVEMENTS CONDITIONS**

- PUBIM-1 **Encroachment Permit.** The applicant shall obtain an encroachment permit from the Engineering Division before commencing any construction activities within any public right-of-way or easement.
- PUBIM-2 **Debris Removal.** All mud, dirt or construction debris carried off the construction site onto adjacent streets shall be removed each day. No materials shall be discharged onto a sidewalk, street, gutter, storm drain or creek.
- Publim-3 **Damage to Street Improvements.** Any damage to street improvements now existing or done during construction on or adjacent to the subject property, shall be repaired to the satisfaction of the City Engineer at the full expense of the applicant. This shall include sidewalk repair, slurry seal, street reconstruction or others, as may be required by the City Engineer.
- PUBIM-4 **Right-of-Way Construction Standards**. All improvements within the public right-of-way, including curb, gutter, sidewalks, driveways, paving and utilities, shall be reconstructed in accordance with approved standards and/or plans and shall comply with the standard plans and specification of the Community Development Department and Chapter 14 of the City Code.

#### **FIRE DEPARTMENT CONDITIONS**

- FIRE-1 Construction of 1,500 Square Feet or Greater. 1500 sq. ft. or more or any addition, remodel, rehabilitation, etc. is 50% of the existing sq. ft.:
  - a) This dwelling will be required install an Automatic Fire Extinguishing System throughout the entire dwelling. Ordinance No. 94-010, Albany Municipal Code, Chapter 11, Section 11-2.3a(3)(a).
  - b) Plans, information sheets on all sprinkler components and hydraulic calculations are required.
  - c) A 110-volt interconnected smoke alarm system with a 10-year lithium battery back-up is acceptable with a fire suppression system.

- FIRE-2 **Fire Rated Construction.** Any portion of a building five (5) feet or less from the property line shall comply with fire-rating requirements of the CBC.
- Gallons-per-Minute Requirement. The water system for fire protection shall comply with City of Albany Fire Department standards. Fire flow test data and water system plans must be provided at time of building plan check. The plans must include all equipment, components and layout of the system. Private fire protection water systems shall be supplied through an approved backflow device per City Engineering Division standards.
- FIRE-5 **Distance From Fire Hydrant.** Before building permit issuance the distance from existing fire hydrants to the building shall be verified and if necessary, a new hydrant shall be shown on the plans and installed prior to combustible construction.

#### Structural Control Measures

- STRUC-1 Illegal Dumping to Storm Drain Inlets and Waterways. On-site storm drain inlets shall be clearly marked with the words "No Dumping! Flows to Bay," or equivalent, using methods approved by the City of Albany.
- Pesticide/Fertilizer Application Landscaping shall be designed to minimize irrigation and runoff, promote surface infiltration where appropriate, and minimize the use of fertilizers and pesticides that can contribute to stormwater pollution. If a landscaping plan is required as part of a development project application, the plan shall meet the following conditions related to reduction of pesticide use on the project site:
  - a) Where feasible, landscaping shall be designed and operated to treat stormwater runoff by incorporating elements that collect, detain, and infiltrate runoff. In areas that provide detention of water, plants that are tolerant of saturated soil conditions and prolonged exposure to water shall be specified.
  - b) Plant materials selected shall be appropriate to site specific characteristics such as soil type, topography, climate, amount and timing of sunlight, prevailing winds, rainfall, air movement, patterns of land use, ecological consistency and plant interactions to ensure successful establishment.
  - c) Existing native trees, shrubs, and ground cover shall be retained and incorporated into the landscape plan to the maximum extent practicable.
  - d) Proper maintenance of landscaping, with minimal pesticide use, shall be the responsibility of the property owner.

## **OPERATIONAL BEST MANAGEMENT PRACTICES (BMPs)**

Stormwater Pollution Prevention Control Measures. The project plans shall include stormwater pollution prevention and control measures for the operation and maintenance of the project during and after construction for the review and approval of the City or County Engineer. The project plan shall identify Best Management Practices (BMPs) appropriate to the uses conducted on-site in order to limit to the maximum extent practicable the entry of pollutants into stormwater runoff.

- BMP-GEN2 **Erosion Control Measures**. The project plan shall also include erosion control measures to prevent soil, dirt and debris from entering the storm drain system, in accordance with the practices outlined in the ABAG *Erosion and Sediment Control Handbook*, California Storm Water Best Management Practice Handbooks, and Regional Water Quality Control Board's *Erosion and Sediment Control Field Manual*
- Responsibility of Contractors. The applicant is responsible for ensuring that all contractors and subcontractors are aware of and implement all stormwater quality control measures. Failure to comply with the approved construction BMPs shall result in the issuance of correction notices, citations and/or a project stop order.
- Paved Sidewalks and Parking Lots. Sidewalks and parking lots shall be swept regularly to prevent the accumulation of litter and debris. Debris resulting from pressure washing shall be trapped and collected to prevent entry into the storm drain system. Washwater containing any soap, cleaning agent or degreaser shall be collected and discharged to the sanitary sewer and shall not be discharged to a storm drain. The applicant shall contact the City Engineer for specific connection and discharge requirements.
- BMP-2A **Private Streets, Utilities and Common Areas.** The owner of private streets and storm drains shall prepare and implement a plan for street sweeping of paved private roads and cleaning of all storm drain inlets.

#### GENERAL CONSTRUCTION BEST MANAGEMENT PRACTICES (BMPs)

- BMP-CNST1 Construction Access Routes. Construction access routes shall be limited to those approved by the City Engineer and shall be shown on the approval grading plan.
- BMP-CNST2 Collection of Construction Debris. Gather all construction debris on a regular basis and place them in a dumpster or other container that is emptied or removed on a weekly basis. When appropriate, use tarps on the ground to collect fallen debris or splatters that could contribute to stormwater pollution.
- Removal of Waste. Remove all dirt, gravel, rubbish, refuse and green waste from the sidewalk, street pavement, and storm drain system adjoining the project site. During wet weather, avoid driving vehicles off paved areas and other outdoor work.
- BMP-CNST4 **Sweeping of Public Right-of-Way.** Broom sweep the sidewalk and public street pavement adjoining the project site on a daily basis. Caked on mud or dirt shall be scraped from these areas before sweeping.
- BMP-CNST5 **Filter Materials at Storm Drain Inlet**. Install filter materials (such as sandbags, filter fabric, etc.) at the storm drain inlet nearest the downstream side of the project site prior to:
  - a) start of the rainy season (October 1);
  - b) site dewatering activities;

- c) street washing activities;
- d) saw cutting asphalt or concrete; and
- e) order to retain any debris or dirt flowing into the City storm drain system. Filter materials shall be maintained and/or replaced as necessary to ensure effectiveness and prevent street flooding. Dispose of filter particles in the trash.
- BMP-CNST6 Containment of Materials. Create a contained and covered area on the site for the storage of bags of cement, paints, flammables, oils, fertilizers, pesticides, or any other materials used on the project site that have the potential for being discharged to the storm drain system by wind or in the event of a material spill.
- BMP-CNST7 Cleaning of Equipment. Never clean machinery, tools, brushes, etc. or rinse containers into a street, gutter, storm drain or stream. See the Building Maintenance/Remodeling flyer for more information.
- Minimize Removal of Natural Vegetation. Minimize removal of natural vegetation or ground cover from the site in order to minimize the potential for erosion and sedimentation problems. Replant the area as soon as possible. All cut and fill slopes shall be stabilized as soon as possible after grading is completed. No site grading shall occur between October 1 and April 15 unless approved erosion and sedimentation control measures are in place.

#### Appeals:

The Albany Municipal Code provides that any action of the Planning and Zoning Commission may be appealed to the City Council if such appeal is filed within 14 calendar days of the date of action. Appeals may be filed in the Community Development Department by completing the required form and paying the required fee. The City Clerk will then schedule the matter for the next available City Council meeting.

Planning Application #:	12-042

Date Received: 8/15/12

Fee Paid: 1974.00

Receipt #: 76703



# City of Albany

#### PLANNING APPLICATION FORM

Please complete the following application to initiate City review of your application. Please be aware that staff may have additional application requirements. For projects requiring Planning and Zoning Commission review, please schedule an appointment with Planning Division staff. The Community Development Department office is open to accept applications Monday, 8:30 AM to 7:00 PM, Tuesday through Thursday 8:30 AM to 5:00 PM, and Friday 8:30 AM to 12:30 PM (closed Noon - 1PM, Mon. -Thu.) at 1000 San Pablo Avenue, Albany, CA 94706 (510) 528-5760.

Fee Schedule (FY 2012-2013)

, 6	2 Schedule (17 2012-2013)	
Ø	Design Review*	\$1,974 / Admin. \$1,049
٥	Parking Exceptions/Reductions - see separate handout*	\$Actual Cost/Min \$1,944
	Conditional Use Permit (major)*	\$Actual Cost/Min \$1,974
	Conditional Use Permit (minor)*	\$1,049
	Sign Permit	\$1,409/\$439 Admin.
	Temporary/Seasonal Conditional Use Permit*	\$439
	Lot Line Adjustment*	\$Actual Cost/Min \$1,049
	Secondary Residential Unit*	\$1,049
	Parcel/Subdivision Map; Planned Unit Development; Condo Conversion*	\$3,199
	Variance*	\$3,199
	Other(s):	\$

<sup>\*</sup>When obtaining more than one planning approval, the full amount for the highest fee will apply and  $\frac{1}{2}$  fee will be charged for any other ones. General Plan Update Fee \$45 included in the fees above. This fee only needs to be paid once for each separately submitted application.

Job Site Address: 1036 Kains		Zoning District:
Property Owner(s) Name:  Kao, MIHG LU	Phone: Fax: 510 - 290-4888	Email:
Mailing Address: 2261 Cedan St.	City: Berkeley	State/Zip:
Applicant(s) Name (contact person):	Phone: 510-364-4539	Email:
	Fax: 510-275-9080 City: Pinole	HUTFOLLOGATT, NET State/Zip: CA 194564

PROJECT DESCRIPTION (Please attach plans if required) The present project propose of o elevate the house around 5 feet to higher to accommodate a habitable lower level and divide the building into two-unit appartments, with a point unit facing the street and a year unit facing the year yard. Each unit shall have private internal stair and its own private garden of living areas. The exterior envelope of the house shall be preserved at point and right sides with new space added towards left and year sides. There shall be two outdoor parkings for each unit on site.

PROJECT ADDRESS: 1036 Kains St.

#### GENERAL INFORMATION (Please fill out this Chart or attach separate plans with information)

Item	Existing	Proposed
Lot Size? (Express in square feet)	5000 SF	5000 SF.
Gross square footage of all building area (including detached & accessory buildings, garages, etc.)	2219 SF	32335F
What is the Floor Area Ratio (FAR) (see handout on how to measure for residential projects)	44 %	65%
What is your lot coverage?	13745F/2T &	15715F/37 d
What is the amount of impervious surface on the lot?	170 SF	576 SF
What is the maximum height of the building? (see handout on how to measure for residential projects)	22-6.5"	27-6"±
How many dwelling units are on your property?	1	2
How many off-street parking spaces do you have?  (front yard parking is not counted unless previously approved by the City)	(	24
What are the dimensions of parking spaces?  (give interior dimensions of enclosed parking spaces)	12 ft. x 18 ft.	16 ft. x 36 ft.
What is the narrowest width of your driveway?	10'	91
Minimum setbacks from structure to property line Front yard:	14-9,5"	151
Side yards:	14 <sup>1</sup> -9,5" 14t 21-4" right 6 <sup>4</sup> 7 29 1	" left 15 <sup>6</sup> 8" rights
Rear Yard:	29'	16'-8"

#### TERMS AND CONDITIONS OF APPLICATION

I, the undersigned owner (or authorized agent) of the property herein described, hereby make application for approval of the plans submitted and made part of this application in accordance with the provisions of the City's ordinances, and I hereby certify that the information given is true and correct to the best of my knowledge and belief.

I understand that the requested approval is for my benefit (or that of my principal). Therefore, if the City grants the approval with or without conditions, and that action is challenged by a third party, I will be responsible for defending against this challenge. I therefore agree to accept this responsibility for defense at the request of the City and also agree to defend, indemnify and hold the City harmless from any costs, claims, penalties, fines, judgments, or liabilities arising from the approval, including without limitation, any award or attorney's fees that might result from the third party challenge.

For this purposes of this indemnity, the term "City" shall include the City of Albany, its officers, officials, employees, agents and representatives. For purposes of this indemnity, the term "challenge" means any legal or administrative action to dispute, contest, attack, set aside, limit, or modify the approval, project conditions, or any act upon which the approval is based, including any action alleging a failure to comply with the California Environmental Quality Act or other laws.

The signature of the property owner is required for all projects. By executing this form you are affirming that you are the property owner.

Signature of Property Owner

Date

ignature of Applicant (if different)

Date



# City of Albany

# Green Building Program Rating System for Remodeling Projects\* Supplemental Application Form

\*Please obtain other appropriate Green Point Checklist for projects other than Single Family Residential Remodeling Projects

1036 KAINS ST.

Checklist Prepared By: YILEH MILL CHULLA

Date Prepared: らーも・1ン			•		
A. Site		INPUT	Resources	Energy	IAQ/Health
Recycle Job Site Construction & Demolition Waste		÷		T	
65% = 1 point; 75% = 2 points; 80% = 4 points	un to 4 Poor	ouroo nto	$\dashv$ '		
2. Salvage Reusable Building Materials	up to 4 Resource pts	y=yes y=	14		
3. Remodel for Mixed Use, Adaptive Reuse, and	4 Nesource pis	y-yes -		l	
Historic Preservation	4 Resource pts	y=yes	1 1		
4. Protect Native Soil	2 Resource pts	y=yes y	4 2		
5. Minimize Disruption of Existing Plants & Trees	1 Resource pt	y=yes 1	1 4		
Implement Construction Site Stormwater Practices	2 Resource pts	y=yes			
7. Protect Water Quality with Landscape Design	2 Resource pts	y=yes			
B. Design Resource-Efficient Landscapes and Gardens	4 Resource pts	y=yes	-		
9. Reuse Materials/Use Recycled Content Materials	4 1 1000d100 pto	, , , , ,			
or Landscape Areas	2 Resource pts	y=yes			
10. Install High-Efficiency Irrigation Systems	2 Resource pts	y=yes			
11. Provide for On-Site Water Catchment / Retention	2 Resource pts	y=yes			
		7 700			
3. Foundation					
I. Incorporate Recycled Flyash in Concrete					T
25% Recycled Flyash = 2 points; Add 1 point for every 10%			-		
ncrease of flyash, up to 5 points	up to 5 Reso	ource nts			
2. Use Recycled Content Aggregate	2 Resource pts	y=yes	-		
3. Insulate Foundation/Slab before backfill	3 Energy pts	y=yes y=yes	_		
	o Energy pro	y-yes			
C. Structural Frame					
. Substitute Solid Sawn Lumber with Engineered Lumber	2 Dansuman ata				
· ·	3 Resource pts	y=yes			
2. Use FSC Certified Wood for framing  For every 10% of FSC lumber used = 2 points, up to 10)	un to 10 Dece				
Use Wood I-Joists for Floors and Ceilings	up to 10 Reso		_		
. Use Web Floor Trusses	2 Resource pts	y=yes	_		
	2 Resource pts	y=yes	_		
Design Energy Heels on Trusses 6" or more	2 Energy pts	y=yes	_		
i. Use Finger-Jointed Studs for Vertical Applications	2 Resource pts	y=yes			
. Use Engineered Studs for Vertical Applications	2 Resource pts	y=yes	_		
J. Use Recycled Content Steel Studs for Interior Framing	2 Resource pts	y=yes	_		
Use Structural Insulated Panels (SIPs)			4		
a. Floors	3 Energy pts	y=yes	4		
b. Wall	3 Energy pts	y=yes	4		
c. Roof	3 Energy pts	y=yes			

			INPUT	Resources	Energy	IAQ/Health
10. Apply Advanced Framing Techniques	4 Resource pts	y=yes				
11. Use Reclaimed Lumber for Non Structural Applications	3 Resource pts	y=yes	•			
12. Use OSB	·					
a. Subfloors	1 Resource pt	y=yes				
b. Sheathing	1 Resource pt	y=yes	Y			
D. Exterior Finish						
Use Sustainable Decking Materials						
a. Recycled content	3 Resource pts	y=yes				
b. FSC Certified Wood	3 Resource pts	y=yes				
2. Use Treated Wood That Does Not Contain Chromium/Arsenic	1 IAQ/Health pt	y=yes				
Install House Wrap under Siding	1 IAQ/Health pt	y=yes				
4. Use Fiber-Cement Siding Materials		y=yes				
;						
E. Plumbing						
Install Water Heater Jacket	1 Energy pt	y=yes				
Insulate Hot and Cold Water Pipes	2 Energy pts	y=yes	Y		2	
Retrofit all Faucets and Showerheads with Flow Reducers	2 Energy pro	, , , , ,			_	
a. Faucets (1 point each, up to 2 points)	Up to 2 Resou	irce pts.				
b. Showerheads (1 point each, up to 2 points)	Up to 2 Resou					
4. Replace Toilets with Ultra-Low Flush Toilets	·					
(1 point each, up to 3 points)	Up to 3 Resou	rce pts.	Y			
5. Install Chlorine Filter on Showerhead	1 IAQ/Health pt	y=yes				
6. Convert Gas to Tankless Water Heater	4 Energy pts	y=yes	Y		4	
7. Install Water Filtration Units at Faucets					•	
(2 points each, up to 4 points)	Up to 4 IAQ/He	alth pts.				
8. Install On-Demand Hot Water Circulation Pump	4 Resource pts	y=yes				
F. Electrical						
1. Install Compact Fluorescent Light Bulbs (CFLs)			7		4	
(6 bulbs=2 points, 10 bulbs =3 points, 12 bulbs = 4 points)	Up to 4 Ene	ergy pts.			4	
2. Install IC-AT Recessed Fixtures with CFLs (1 point each, up to						
5 points)	Up to 5 Ene				1	
3. Install Lighting Controls (1 point per fixture, up to 4 points)	Up to 4 Ene	ergy pts.			7	
Install High Efficiency Ceiling Fans with CFLs     (1 point each, up to 4 points)	Up to 4 Ene	vrav nto				
(1 point each, up to 4 points)	Op to 4 Life	igy pis.				
<u> </u>						
G. Appliances		ı				
Install Energy Star Dishwasher	1 Energy pt	y=yes	$\rightarrow$			
2. Install Washing Machine with Water and Energy	4.5					
Conservation Features	1 Energy pt	y=yes	7			
3.Install Energy Star Refrigerator	1 Energy pt	y=yes	<del>- T</del>		)	
Install Built-In Recycling Center	3 Resource pts	y=yes	-			
H. Insulation			1			
Upgrade Insulation to Exceed Title 24 Requirements     Walls	0.5	г				
a. Walls	2 Energy pts	y=yes	-1-		20	
b. Ceilings	2 Energy pts	y=yes	<u> </u>		1 7 1	


			WOUT	Desauroon	- Coores	IAQ/Health
Install Floor Insulation over Crawl Space	4 Energy pts	V=V00	INPUT	Resources	Energy	IAQ/Health
Install Recycled-Content, Fiberglass Insulation with	4 Ellergy pis	y=yes			4	
No Added Formaldehyde	3 IAQ/Health pts	y=yes	\			2
Use Advanced Infiltration Reduction Practices	2 Energy pts	y=yes				
5. Use Cellulose Insulation	3, F	, ,				
a. Walls	4 Resource pts	y=yes				
b. Ceilings	4 Resource pts	y=yes				
6. Alternative Insulation Products (Cotton, spray-foam)						
a. Walls	4 Resource pts	y=yes				
b. Ceilings	4 Resource pts	y=yes				
I. Windows						
Install Energy-Efficient Windows						
a. Double-Paned	1 Energy pt	y=yes	Y			
b. Low-Emissivity (Low-E)	2 Energy pts	y=yes	<u> </u>		22	
c. Low. Conductivity Frames	2 Energy pts	y=yes	Y		2	
2. Install Low Heat Transmission Glazing	1 Energy pt	y=yes	(			
J. Heating Ventilation and Air Conditioning						
1. Use Duct Mastic on All Duct Joints	2 Energy pts	y=yes	Y		2	
2. Install Ductwork within Conditioned Space	3 Energy pts	y=yes				
3. Vent Range Hood to the Outside	1 IAQ/Health pt	y=yes	Υ			
4. Clean all Ducts Before Occupancy	2 IAQ/Health pts	y=yes	·\-			2
5. Install Solar Attic Fan	2 Energy pts	y=yes				
6. Install Attic Ventilation Systems	1 Energy pt	y=yes	Y		\ \	
7. Install Whole House Fan	4 Energy pts	y=yes				
8. Install Sealed Combustion Units						
a. Furnaces	3 IAQ/Health pts	y=yes	Y			3
b. Water Heaters	3 IAQ/Health pts	y=yes	4-			33
9. Replace Wall-Mounted Electric and Gas Heaters with						
Through-the-Wall Heat Pumps	3 Energy pts	y=yes				
10. Install 13 SEER/11 EER or higher AC with a TXV	3 Energy pts	y=yes				
11. Install AC with Non-HCFC Refrigerants	2 Resource pts	y=yes				
40 L. Lill 000/ Account Fuel Hillington Efficiency /AFUE) Furnace	0.5					
12. Install 90% Annual Fuel Utilization Efficiency (AFUE) Furnace	2 Energy pts	y=yes				
13. Retrofit Wood Burning Fireplaces	4 14 0 /1 1 14 4					
a. Install EPA certified wood stoves/inserts	1 IAQ/Health pt	y=yes				
b. Install/Replace Dampers	1 Energy pt	y=yes				
c. Install Airtight Doors	1 Energy pt	y=yes				
14. Install Zoned, Hydronic Radiant Heating	3 Energy pts	y=yes				
15. Install High Efficiency Filter	4 IAQ/Health pts					
16. Install Heat Recovery Ventilation Unit (HRV)	5 IAQ/Health pts	y=yes				
17. Install Separate Garage Exhaust Fan	3 IAQ/Health pts	y=yes				
K. Renewable Energy and Roofing						
Pre-Plumb for Solar Water Heating	4 Energy pts	y=yes				
Install Solar Water Heating System	10 Energy pts	y=yes y=yes				
Pre-Wire for Future Photovoltaic (PV) Installation	4 Energy pts	y=yes y=yes				
4. Install Photovoltaic (PV) System	4 Energy plo	, ,00				
(1.2 kw = 6 points, 2.4 kw = 12 points, 3.6 kw = 18 points)	Up to 18 Ene	erav ots				

			INPUT	Resources	Energy	IAQ/Health
6. Select Safe and Durable Roofing Materials	1 Resource pt	y=yes		1		
7. Install Radiant Barrier	3 Energy pts	y=yes				
L. Natural Heating and Cooling						
1. Incorporate Passive Solar Heating	5 Energy pts	y=yes				
2. Install Overhangs or Awnings over South Facing Windows	3 Energy pts	y=yes	Y		3	
3. Plant Deciduous Trees on the West and South Sides	3 Energy pts	y=yes				
M. Indoor Air Quality and Finishes						
1. Use Low/No-VOC Paint	1 IAQ/Health pts	v=ves				
Use Low VOC, Water-Based Wood Finishes	2 IAQ/Health pts					
3. Use Low/No VOC Adhesives	3 IAQ/Health pts					
Use Salvaged Materials for Interior Finishes	3 Resource pts	y=yes				
Use Engineered Sheet Goods with no added Urea	o resource pro	<i>y</i> , ,				
Formaldehyde	6 IAQ/Health pts	v=ves				
Use Exterior Grade Plywood for Interior Uses	1 IAQ/Health pts					
7. Seal all Exposed Particleboard or MDF	4 IAQ/Health pts					
8. Use FSC Certified Materials for Interior Finish	4 Resource pts	y=yes				
9. Use Finger-Jointed or Recycled-Content Trim	1 Resource pts	y=yes				
10. Install Whole House Vacuum System	3 IAQ/Health pts					
·	o ii iqi roditi pto	, ,00				
N. Flooring						
• -						
Select FSC Certified Wood Flooring     Use Periods Processing Metasials	8 Resource pts	y=yes				
Use Rapidly Renewable Flooring Materials     Use Reputal of Content Connecting Titles	4 Resource pts	y=yes				
Use Recycled Content Ceramic Tiles     Install Natural Linoleum in Place of Vinyl	4 Resource pts	y=yes				
Use Exposed Concrete as Finished Floor	5 IAQ/Health pts	y=yes				
6. Install Recycled Content Carpet with Low VOCs	4 Resource pts	y=yes				
o. motali recojolog comoni carpet with zow reco	4 Resource pts	y=yes				
O. City of Albany Incentives		ŀ				
1. Additions less than 50% increase in floor area	20 Resource pts	y=yes		T		
2. Additions less than 200sq.ft. or resulting in less than 1,500sq.ft.	,	y=yes				
3. Seismic upgrade of existing building	25 Resource pts	y=yes	7	25		
4.For having a hybrid or zero emissions vehicle	2 IAQ/Health pts	y=yes				
5. For having no automobile	5 Resource pts	y=yes				
6. Plant more than one street tree when feasible	2 IAQ/Health pts	y=yes				
7. Earthquake kit	2 IAQ/Health pts	y=yes				
TOTAL POINTS ACCUMULATED:	50 points total Reg'd			86		
(50 Points REQUIRED from all 3 columns)		· _			V V	
Jo . Sinto readinabilition of originally						

406 1 5 2012

COMMUNITY DEVELOPMENT
DEPARTMENT

# Milgard Classic Series

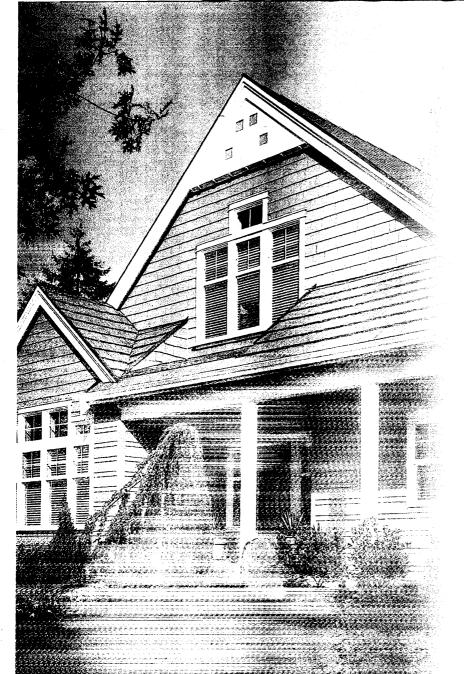

vinyl windows

It's the standard by which all others are measured—Milgard's Classic Series.


Our Classic Series was designed as an alternative to a wood window, and as such, the bold design and clean lines offer a painted millwork look. But unlike wood windows, they can't rot or warp. And they will never need painting or require excessive maintenance.

- Milgard's Classic Series offers a 3-3/8" frame depth and 1" overall insulating glass unit for superior energy efficiency and sound deadening properties.
- Fusion welded frame and sash, for added strength and performance from the weather.
- Visual appeal of equal site lines makes design consistency a breeze. Interior glazing allows for easy access to insulated units.
- On horizontal sliders and single hung windows, our Positive Action Locking System™ automatically locks when the window is securely closed. No more guess work.
- On larger windows, our Classic Series offers aluminum reinforcement within the walls making a window strong enough to receive a light commercial rating.
- The insulating properties of multi-chambered vinyl profiles produce lower U-values.

#### Other features include:

Dual pull rails enable windows of any size or wall placement to open effortlessly.

On casement windows, our single-pull, multiple-throw locking system secures and locks the window in several places with a single action.

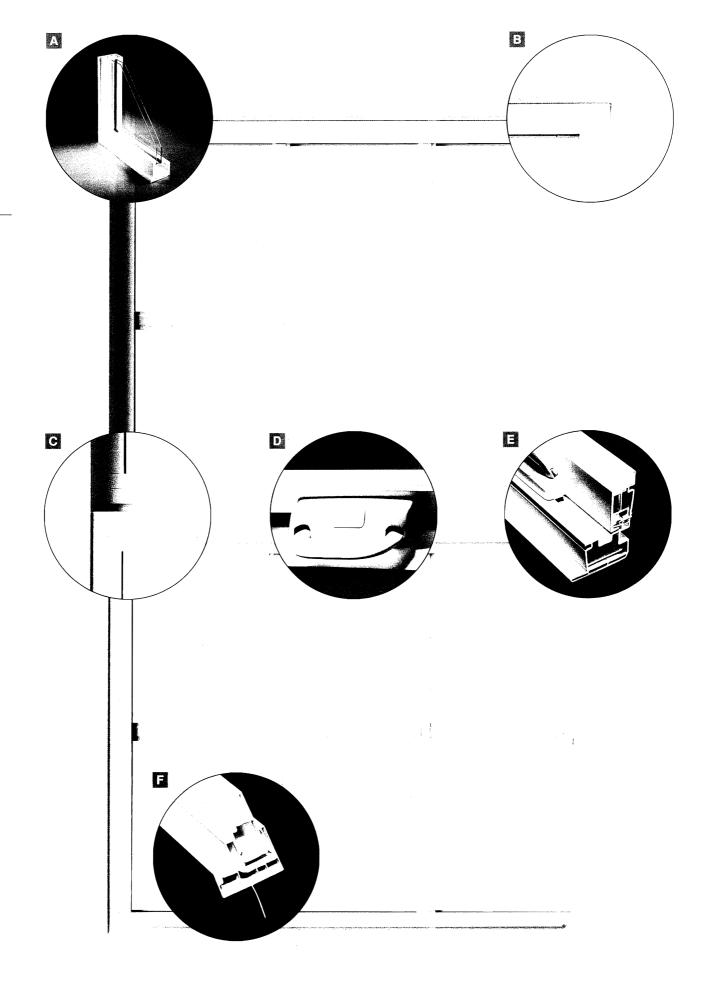

1036 Kains

# Design unlimited

At Milgard, we can build hundreds of window styles to meet your design needs. But it's not just the windows themselves that determine design. It's the options that transform ordinary to extraordinary—things like equal site lines, custom grid patterns and non-standard shapes. And we offer more mulling and stacking options to allow you even greater creativity.

Our wide variety of styles within our Vinyl Classic Series allows you to combine windows without sacrificing consistent styling. That means picture windows pair with single hungs; radius tops pair with casements. If you can dream it, chances are we can build it.



Milgard's Infodesk allows architects and designers access to all of our window designs in both DXF and DWG formats. You can explore just about any window or glass topic using full-motion video. Then view the extensive photo gallery and scan through 400 colorful screens of information. Ask your Milgard representative for more information about our newest design tool.



