2022.10.07



ADENANTHOS

EUROPAEA

ASPARAGUS

MYERS -

CREPE

MYRTLE

ACACIA

COGNATA

COUSIN ITT

LOMANDRA

LOMANDRA

SEA BREEZE

SEA BREEZE

WOOD FENCE AT FRONT TO

BE 3'-0" MAX. HEIGHT FROM

FINISHED GRADE, TYP.

WOOD STEPS

(E) ELCT. AND GAS METERS

807 SF (E) 1 STORY

BUILDING TO BE

REMODELED

HATCH INDICATES (N)

DRIVEWAY

PROPOSED CONCRÈTE

(E) BUILDING HEIGHT =19'-8"

(2/ A0.1) SITE PLAN - LANDSCAPE PLAN SCALE: 1/8" = 1'-0"

CONC. DRIVEWAY

- (E) LANDSCAPE/CONC. TO BE DEMOLISHED, SEE LANDSCAPE PLAN FOR

MORE INFO

14'-2 1/8" (E) FRONT SETBACK

HYDRANGEA

DENSIFLORUS







PHOTOS OF (E) BUILDING

DECOMPOSED GRAVEL

(N) STAIR, 60SF COUNTED

BUILDING ADDITION

N) BUILDING HEIGHT = 25'-0"

WOOD FENCE AT REAR TO BE

6'-0" MAX. HEIGHT FROM

FINISHED GRADE, TYP.



LAWN

(E) STRUCTURE TO

(N) OUTDOOR DECK TO BE

FLOOR 20" ABOVE GRADE

ÀT SAME LEVEL AS 1ST

26'-7" (N) REAR SETBACK

9'-0"

BE DEMOLISHED —

PITTOSPORUM TENUIFOLIUM



LOCATION OF (N) DEVELOPMENT

FAMILY HOUSE TO BE A 2,062 SF 2-STORY SINGLE

FAMILY BUILDING. ZONGING: OCCUPANCY TYPE: CONSTRUCTION TYPE: **BUILDING HEIGHT**

PROJECT DESCRIPTION: REMODEL OF AN EXISTING 807 SF 1-STORY SINGLE

TO RIDGE: APPLICABLE CODES: 2019 CALIFORNIA RESIDENTIAL, ELECTRICAL MECHANICAL, AND PLUMBING CODES 2019 CALIFORNIA ENERGY CODE

	2019 CALIFORNIA	GREEN BUILDING	CODE
LOT COVERAGE: LOT SIZE: LOT COVERAGE: % COVERAGE:	EXISTING 3,751 SF 807 SF 21.5%	PROPOSED NO CHANGE 1,540 SF 41%	CHANG NO CH/ +733 SI +19.5%
FLOOR AREAS: 1ST FLOOR 2ND FLOOR TOTAL: FLOOR AREA RA	EXISTING 807 GSF 0 807 TIO: 54.9%	PROPOSED 1,478 GSF 584 GSF 2,062 GSF	CHANG + 671 G + 584 G + 1,255
PROGRAM:	EXISTING	PROPOSED	CHANG

15. ALL ELECTRICAL, MECHANICAL, AND PLUMBING WORK AND MATERIALS SHALL BE IN FULL ACCORDANCE WITH THE LATEST RULES AND BEDROOMS REGULATIONS OF THE NATIONAL BOARD OF FIRE UNDERWRITERS, BATHROOMS THE STATE FIRE MARSHALL, THE SAFETY ORDERS OF THE DIVISION LIVINGROOM: NO CHANGE AND ORDINANCE. NOTHING ON THESE DRAWINGS IS TO BE NUMBER OF STORIES IN BUILDING: PROPOSED CONSTRUCTED TO PERMIT WORK NOT CONFORMING TO THESE CODES. ANY QUESTIONS REGARDING INSTALLATIONS SHALL BE BROUGHT TO

> THE ARCHITECT FOR CLARIFICATION. 16. INSTALL APPROPRIATE INSULATION AS NOTED ON THE TITLE 24 REPORT AT ALL SPACES BETWEEN STUDS, JOISTS, AT ALL EXTERIOR WALLS, CEILINGS AND FLOORS WHERE

. EXAMINATION OF THE SITE AND PORTIONS THEREOF WHICH

WILL AFFECT THIS WORK SHALL BE MADE IMMEDIATELY BY THE CONTRACTOR, WHO SHALL COMPARE IT WITH THE DRAWINGS

AND SATISFY HIM/HERSELF TO CONDITIONS UNDER WHICH WORK

IS TO BE PERFORMED. HE SHALL AT SUCH TIME ASCERTAIN AND CHECK LOCATIONS OF THE EXISTING STRUCTURES AND EQUIPMENT

CONFLICTS OR OMISSIONS, ETC., SHALL BE REPORTED TO THE

THE ATTENTION OF THE ARCHITECT AND OWNER BEFORE

FOR THE PROJECT PRIOR TO COMMENCEMENT OF WORK.

ARCHITECT BEFORE PROCEEDING WITH ANY WORK

PROCEEDING WITH THE WORK

UNLESS OTHERWISE NOTED.

PRIOR TO ANY START OF WORK

WHICH MAY AFFECT HIS WORK. NO ALLOWANCE SHALL BE MADE FOR

ANY EXTRA EXPENSE TO WHICH HE MAY BE DUE BECAUSE OF FAILURE OR NEGLECT ON HIS PART TO MAKE SUCH EXAMINATIONS. ANY

. ANY ERRORS, OMISSIONS, OR CONFLICTS FOUND IN THE VARIOUS

3. WHEN REFERENCED IN NOTES, ARCHITECT SHALL BE SANDY CHAN

4. CONTRACTOR SHALL PROVIDE ARCHITECT AND OWNER WITH A

5. CONTRACTOR SHALL PROTECT NEW MATERIALS AND FINISHES

DUST WATER ETC. AND SHALL PROVIDE AND MAINTAIN TEMPORAR'

AS REQUIRED DURING THE PERIOD OF CONSTRUCTION. DAMAGE TO

NEW MATERIALS, FINISHES, STRUCTURES, AND EQUIPMENT SHALL BE REPAIRED OR REPLACED. CONTRACTOR SHALL COORDINATE TEMPORARY

BARRICADES WITH ARCHITECT AND OR OWNER PRIOR TO COMMENCEMENT

6. ALL CONSTRUCTION WORK, ARCHITECTURAL, MECHANICAL, PLUMBING FLECTRICAL ETC. SHALL CONFORM TO THE LATEST EDITION OF THE

CALIFORNIA BUILDING CODE AND THE LATEST EDITION OF THE GOVERNING CODES AND REGULATIONS AS ADOPTED BY THE CITY AND COUNTY IN WHICH

THE PROJECT OCCURS. ALL WORK SHALL BE DONE IN A THOROUGH,

7. ALL DIMENSIONS ON CONSTRUCTION DRAWINGS ARE TO FACE OF

FINISH (FOF) OR FACE OF CONCRETE (FOC) UNLESS OTHERWISE NOTED

8. ALL DIMENSIONS TAKE PRECEDENCE OVER SCALE. ANY DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE ARCHITECT. CONTRACTOR

9. ALL WORK LISTED, SHOWN OR IMPLIED ON ANY CONSTRUCTION DOCUMENT

WHERE NOTED. THE CONTRACTOR SHALL CLOSELY COORDINATE HIS WORK

TO BE THE CENTER OF PARTITION, MULLION, OR COLUMN. DIMENSIONS

ARE TO TOP PLATE OR TOP OF SUBFLOOR INSECTION OR ELEVATION

SHALL NOT SCALE DRAWINGS OUESTIONS REGARDING DIMENSIONS SHALL BE BROUGHT TO THE ATTENTION OF THE ARCHITECT OR OWNER

SHALL BE SUPPLIED AND INSTALLED BY THE CONTRACTOR EXCEPT

WITH THAT OF OTHER CONTRACTORS OR VENDORS TO ASSURE THAT

ALL SCHEDULES ARE MET AND ALL WOROK IS DONE IN CONFORMANCE

TO MANUFACTURER'S REQUIREMENTS. WORK REQUIRED UNDER THIS

CONTRACT SHALL INCLUDE ALL LABOR, MATERIALS, EQUIPMENT, ETC.

10. THE USE OF THE WORD 'PROVIDE' IN CONNECTION WITH ANY ITEM

SPECIFIED IS INTENDED TO MEAN THAT SUCH ITEM SHALL BE FURNISHED.

11. THE CONTRACTOR SHALL MAINTAIN A CURRENT AND COMPLETE SET OF

12. THE CONTRACTOR SHALL REMOVE ALL RUBBISH AND WASTE MATERIALS

13. THE CONSTRUCTION DOCUMENTS ARE PROVIDED TO ILLUSTRATE THE

DESIGN AND GENERAL TYPE OF CONSTUCTION DESIRED AND IMPLY THE

FINEST QUALITY OF CONSTRUCTION, MATERIAL AND WORKMANSHIP

14. DETAILS SHOWN ARE TYPICAL. SIMILAR DETAILS APPLY IN SIMILAR

INSTALLED, AND CONNECTED WHERE SO REQUIRED, EXCEPT AS NOTED

NECESSARY TO COMPLETE THIS PROJECT. ALL MATERIALS SHALL

BE NEW AND UNUSED, UNLESS SPECIFICALLY NOTED, AND BE OF A

CONSTRUCTION DOCUMENTS ON THE JOB SITE AT ALL PHASES OF

CONSTRUCTION FOR USE OF ALL TRADES AND SHALL PROVIDE ALL

WORK INDICATED, SHALL COMPLY WITH THE DRAWINGS.

AREAS IN OR OUTSIDE THE JOB SITE.

THROUGHOUT

SUBCONTRACTORS WITH CURRENT CONSTRUCTION DOCUMENTS AS

OF ALL SUBCONTRACTORS AND TRADES ON A REGULAR BASIS, AND

SHALL EXERCISE STRICT CONTROL OVER JOB CLEANING TO PREVENT ANY DIRT, DEBRIS OR DUST FROM AFFECTING IN ANY WAY, FINISHED

REQUIRED. THE CONTRACTOR, IN ASSUMING RESPONSIBILITY FOR THE

QUALITY ACCEPTABLE BY INDUSTRY STANDARDS.

WORKMANLIKE MANNER AND EQUAL TO THE BEST STANDARDS OF THE

FROM DAMAGE WHICH MAY OCCUR FROM CONSTRUCTION, DEMOLITION,

COMPLETE COST BREAKDOWN AND SCHEDULE OF CONSTRUCTION

PARTS OF THE CONSTRUCTION DOCUMENTS SHALL BE BROUGHT TO

17. WINDOW SIZES AND DOOR HEAD HEIGHTS ARE NOMINAL DIMENSIONS. REFER TO MANUFACTURER FOR ACTUAL ROUGH OPENING SIZES.

18. ALL CHANGES IN FLOOR MATERIAL OCCUR AT CENTERLINE OF DOOR OR FRAMED OPENING UNLESS OTHERWISE INDICATED ON THE

19. SEALANT, CAULKING, AND FLASHING, ETC., LOCATIONS SHOWN ON DRAWINGS ARE NOT INTENDED TO BE INCLUSIVE. FOLLOW MANUFACTURER'S INSTALLATION RECOMMENDATIONS AND STANDARD INDUSTRY AND BUILDING PRACTICES.

20. ALL ATTICS, RAFTER SPACES, SOFFITS, CRAWLSPACES SHALL BE FULLY VENTILATED TO 1/150 OF AREA. CROSS VENTILATION SHALL BE PROVIDED AT ROOFS WITH PERFORATED EAVE BLOCKING WITH MESH SCREENS OR ROOF VENT UNITS.

21. PROVIDE WOOD BLOCKING FOR ALL TOWEL BARS., ETC.

22. ALL MATERIALS FOR USE ON A PROJECT SHALL BE STORED WITHIN

23. THE CONTRACTOR SHALL PERSONALLY SUPERVISE AND DIRECT THE WORK OR SHALL KEEP A COMPETENT EMPLOYEE, AUTHORIZED TO RECEIVE INSTRUCTIONS AND ACT ON THE CONTRACTOR'S BEHALF, CONTINUOUSLY ON SITE DURING WORK HOURS OR AS AGREED UPON

24. ALL QUESTIONS REGARDING SHALL BE DIRECTED TO THE ARCHITECT 25. PROJECT CLOSEOUT:

A. CONTRACTOR SHALL REVIEW PROJECT WITH ARCHITECT AND OR OWNER TO ENSURE THAT ALL REQUIREMENTS OF THE CONTRACT DOCUMENTS HAVE BEEN FOLLOWED.

B. CONTRACTOR SHALL OBTAIN ALL CERTIFICATES AND NOTICES

D. UPON COMPLETION, THE ARCHITECT SHALL, AT THE OWNER'S REQUEST, COMPILE A PROJECT PUNCH LIST NOTING ANY CORRECTIONS, OR OMMISSIONS. ARCHITECTS ACCEPTANCE WILL BE CAUSE FOR FINAL PAYMENT, UNLESS SPECIFICALLY DETERMINED OTHERWISE BY OWNER.

C. ALL WORK PERFORMED SHALL BE CLEAN AND READY FOR USE

THE HVAC CONTRACTOR SHALL SUPERVISE ALL OF THE WORK DONE DURING INSTALLATION. ALL MECHANICAL SYSTEMS SHALL BE INSPECTED BY THE MECHANICAL ENGINEER PRIOR TO INSPECTION AND AT COMPLETION OF JOB TO VERIFY THAT ALL SYSTEMS OPERATE PROPERLY.

BARRICADES, CLOSURE WALLS, ETC. AS RQUIRED TO PROTECT THE HOMEOWNER CONTRACTOR SHALL COORDINATE ALL TRADES ASSOCIATED WITH MECHANICAL AND CEILING WORK AS REQUIRED FOR PROPER

> PROVIDE BOTH RETURN AND SUPPLY AIR IN ACCORDANCE WITH LOCAL CODES. THE HVAC ENGINEER SHALL DETERMINE WHAT NEW EQUIPMENT IS NECESSARY TO ADJUST THE EXISTING EQUIEMENT IN ORDER TO MEET CODE REQUIREMENTS

DOORS, WINDOWS, HARDWARE

THE CONTRACTOR SHALL INSTALL REQUIRED DOOR AND FRAME ASSEMBLIES AS SHOWN ON THE DRAWINGS. IF NEW DOORS AND WINDOWS ARE INTENDED TO MATCH EXISTING DOORS AND WINDOWS, THE CONTRACTOR SHALL SOURCE AND PROVIDE DOORS AND WINDOWS TO MATCH EXISTING AND VERIFY WITH ARCHITECT AND CLIENT BEFORE ORDERING

DOOR HARDWARE SHALL MATCH EXISTING IN FINISH AND COLOR, U.O.N.

WALL AND CEILING FINISHES

THE CONTRACTOR SHALL PATCH AND PREP ALL WALLS PRIOR TO COMMENCING WORK. ALL SURFACES FROM FLOOR TO CEILING AND ALL VERTICAL SURFACES SHALL BE CONSIDERED WALLS.

ALL WALLS AND CEILINGS SHALL BE PREPARED TO ACHIEVE A LEVEL 5 FINISH. ALL WOOD ELEMENTS SUCH AS TRIM, SHELVING, WOOD DOORS SHALL BE PRIMED, SANDED AND FINISHED WITH 2 COATS OF SEMI-GLOSS ENAMEL, FREE OF BRUSH MARKS.

AT ALL AREAS WHERE EXISTING PARTITIONS MEET NEW PARTIONS, THE AREAS SHALL BE SANDED AND PATCHED TO ENSURE A SMOOTH AND SEAMLESS TRANSITION FROM THE EXISTING TO NEW AREA

PRIOR TO PAINTING, THE CONTRACTOR SHALL REMOVE ALL SWITCH PLATE COVERS, RECEPTACLE COVERS, HARDWARE AT DOORS AND OTHER SURFACES. ALL PAINT SHALL BE ZERO VOC LATEX BASED PAINTS. ALL SURFACES SHALL

RECEIVE 1 PRIMER COAT AND 2 FINISH COATS OF PAINT.

E FLOORING SUBCONTRACTOR SHALL ENSURE ALL SURFACES ARE PREPPED AND READY TO RECEIVE FLOOR FINISHES. FLOOR SURFACES SHALL BE SMOOTH AND LEVELED AS REQUIRED PRIOR TO PROVIDING FLOOR FINISH. PROVIDE SELF LEVELING CEMENTITIOUS COMPOUND TO LEVEL FLOORS IF NECESSARY. ALL FLOORING TO BE PREPPED AS REQUIRED BY MANUFACTURER'S SPECIFICATIONS.

DURING FLOORING INSTALLATION AND FOR AN APPROPRIATE TIME AFTER FLOORING HAS BEEN INSTALLED, THE FLOOR SHALL BE PROTECTED AND CLOSED TO WALKING TRAFFIC.

ALL PARTITIONS SHALL HAVE RESILIENT BASE TO MATCH ADJACENT AND

AFTER WORK HAS BEEN COMPLETED, THE CONTRACTOR SHALL CLEAN ALL REMAINING ADHESIVE. SCRAPS. AND ASSOCIATED MATERIALS AND REMOVE

THE CONTRACTOR SHALL PROVIDE PROTECTION FOR ALL EXISTING FLOORING FOR THE DURATION OF THE PROJECT. AND REMOVE ALL FLOORING PROTECTION UPON COMPLETION OF THE PROJECT.

IF THE FLOORING IS IN MODULAR UNITS SUCH AS WOOD, TILE OR CARPET SQUARES, DIMENSIONED DRAWINGS SHALL BE PROVIDED TO THE ARCHITECT FOR REVIEW PRIOR TO INSTALLATION.

PROVIDE FLUSH TRANSITIONS BETWEEN EACH FLOORING MATERIAL. IF FLUSH TRANSITIONS CAN NOT BE PROVIDED, TRANSITION METHODS SHOULD BE APPROVED BY THE ARCHITECT PRIOR TO INSTALLATION.

PAINTS, COATINGS AND FINISHES

1. CARPET MUST MEET ONE OF THE FOLLOWING: (CALGREEN 4.504.3) A. CARPET AND RUG INSTITUTE GREEN LABEL PLUS PROGRAM B. CALIFORNIA DEPARTMENT OF PUBLIC HEALTH STANDARD PRACTICE FOR THE TESTING OF VOCS C. NSF / ANSI 140 AT THE GOLD LEVEL

D. SCIENTIFIC CERTIFICATION SYSTEMS SUSTAINABLE CHOICE E. CALIFORNIA COLLABORATIVE FOR HIGH PERFORMANCE SCHOOLS EQ.2.2 AND LISTED IN THE CHPS HIGH PERFORMANCE PRODUCT DATABASE CARPET CUSHION MUST MEET CARPET AND RUG INSTITUTE GREEN LABEL AND INDOOR CARPET ADHESIVE AND CARPET PAD ADHESIVE MUST NOT EXCEED 50 G/L VOC CONTENT

2. COMPOSITE WOOD PRODUCTS: HARDWOOD, PLYWOOD, PARTICLE BOARD AND MEDIUM DENSITY FIBERBOARD COMPOSITE WOOD PROEUCTS USED ON INTERIOR OR EXTERIOR SHALL MEET CARB AIR TOXIC CONTROL MEASURE FOR COMPOSITE WOOD. SEE CALGREEN TABLE 4.504.5

3. INTERIOR PAINTS AND COATINGS: COMPLY WITH VOC LIMITS IN THE AIR RESOURCES BOARD ARCHITECTURAL COATINGS SUGGESTED CONTROL MEASURE AND CALIFORNIA CODE OF REGULATIONS TITLE 17 FOR AEROSOL PAINTS. SEE CALGREEN TABLE 4.504.3

4. LOW VOC CAULKS, CONSTRUCTION ADHESIVES, AND SEALANTS: SEE CALGREEN TABLES 4.504.1 AND 4.504.2

- LAND SURVEY
- PROPOSED FLOOR PLANS EXISTING AND PROPOSED ROOF PLANS
- EXISTING BUILDING ELEVATIONS PROPOSED BUILDING ELEVATIONS
- PROPOSED BUILDING SECTIONS

NEW STUD WALL TO BE 2X4 (INTERIOR) OR

BY THE HOMEOWNER.

2X6 (EXTERIOR), S.S.D. EXTERIOR WINDOWS & DOORS, SEE EXTERIOR WINDOW&DOOR SCHEDULE D# INTERIOR DOOR, SEE INTERIOR DOOR SCHEDULE

DASHED LINE INDICATES ITEM ABOVE OR

DASHED LINE & TONE INDICATES SOFFIT (LOWERED CEILING) ABOVE, VERIFY HEIGHT W/

WALL MOUNTED LIGHT, SEE LIGHT FIXTURE SCHEDULE FIELD VERIFY LOCATION W/ OWNER

CEILING MOUNTED LIGHT, SEE LIGHT FIXTURE SCHEDULE & FIELD VERIFY LOCATION W/ OWNER

RECESSED LIGHT FIXTURE, FIELD VERIFY ALL LOCATION

W/ OWNER

DOWNSPOUT

SPRINKLER HEAD, SEE SPRINKLER DRAWINGS FIRE ALARM BELL

WALL SWITCH FOR BATH EXHAUST. USE HUMIDITY SENSOR

SWITCH IN BATHROOMS WITH SHOWERS OR BATHTUBS

WALL SWITCH, FIELD VERIFY LOCATIONS AND GROUPING WALL

110 VAC DUPLEX OUTLET, FIELD VERIFY LOCATIONS, HEIGHT AND QUANTITIES W/ OWNER

110 VAC DUPLEX GFCI OUTLET, FIELD VERIFY LOCATIONS, HEIGHT W/ OWNER

BE A LISTED "EXTRA DUTY" RECEPTACLE, FIELD VERIFY LOCATIONS, HEIGHT W/ OWNER

COMBO SMOKE / CO DETECTOR, INTERCONNECTED,

GAS BIB FOR LAUNDRY, RANGE, FURNACE, WATER HEATER &

DOORBELL, VERIFY REQ'TS W/ OWNER

THERMOSTAT, FIELD VERIFY LOCATION W/ OWNER

EXTERIOR EXHAUST VENT, VERIFY STYLE AND FINISH AND

DASH LINE INDICATES DUCT LOCATION, FIELD VERIFY

ELECTRICAL PANEL OR AV HOMERUN PANEL

A0.1

PROJECT INFOMATION

ARCHITECTURE A0.1 COVER PAGE & SITE PLAN & LANDSCAPE PLAN

- A2.0 EXISTING & DEMOLITION PLAN & STREET ELEVATION

EXTERIOR WINDOW SCHEDULE AND INSTALLATION DETAILS

SHEET INDEX

STEVEN CHAN 275 SEA VIEW AVE. PIEDMONT, CA 94610 JEGREENSOLUTIONS@GMAIL.COM (510)717-0029

GENERAL CONTRACTOR

ARCHITECT SANDY CHAN 5429 TELEGRAPH AVE OAKLAND CA 94609 S.STUDIOPAZ@GMAIL.COM

(415)819-4811 DESIGNER/DRAFTER 5905 BAYVIEW AVE RICHMOND, CA 94804 HJIADESIGN@GMAIL.COM (415) 528-9534

STRUCTURAL ENGINEER

T-24 / ENERGY ENGINEER

P.O. BOX 1473, EL CERRITO, CA 94530 ADELKASIM@QMAIL.COM (650) 219-4290

GEOTECHNICAL ENGINEERING ADEL KASIM HALLENBECK/ALLWEST GEOTECHNICAL ENGINEERING CONSULTANTS

110 VAC DUPLEX OUTLET AT OUTDOOR "WET" LOCATION TO

DATA OUTLET W/ PHONE AND COAXIAL CABLE, VERIFY

W/ OWNER. AT TV LOCATIONS, PROVIDE FOR WALL MTD.

HARDWIRED & W/ BATTERY BACK-UP

HOSE BIB WITH ANTI-SIPHON DEVICE, FIELD VERIFY LOCATION W/

CEILING/ WALL REGISTER FOR HVAC FIELD VERIFY LOCATION W/ OWNER

(1/ A0.1) SITE PLAN SCALE: 1/8" = 1'-0"

59'-2 7/8" (N) BUILGING LENDTH

DASHED LINE INDICATES

ND FLOOR 524 SF **BUILDING ADDITION**

PROJECT TEAM

SYMBOL/WALL LEGEND & GENERAL NOTES

GENERAL NOTES

REVISIONS

SID Δ


O n Z 825 SA 825 SAN ALBANY,

COVER PAGE


Date 10/07/2022


Scale Drawn HJ


Sheet

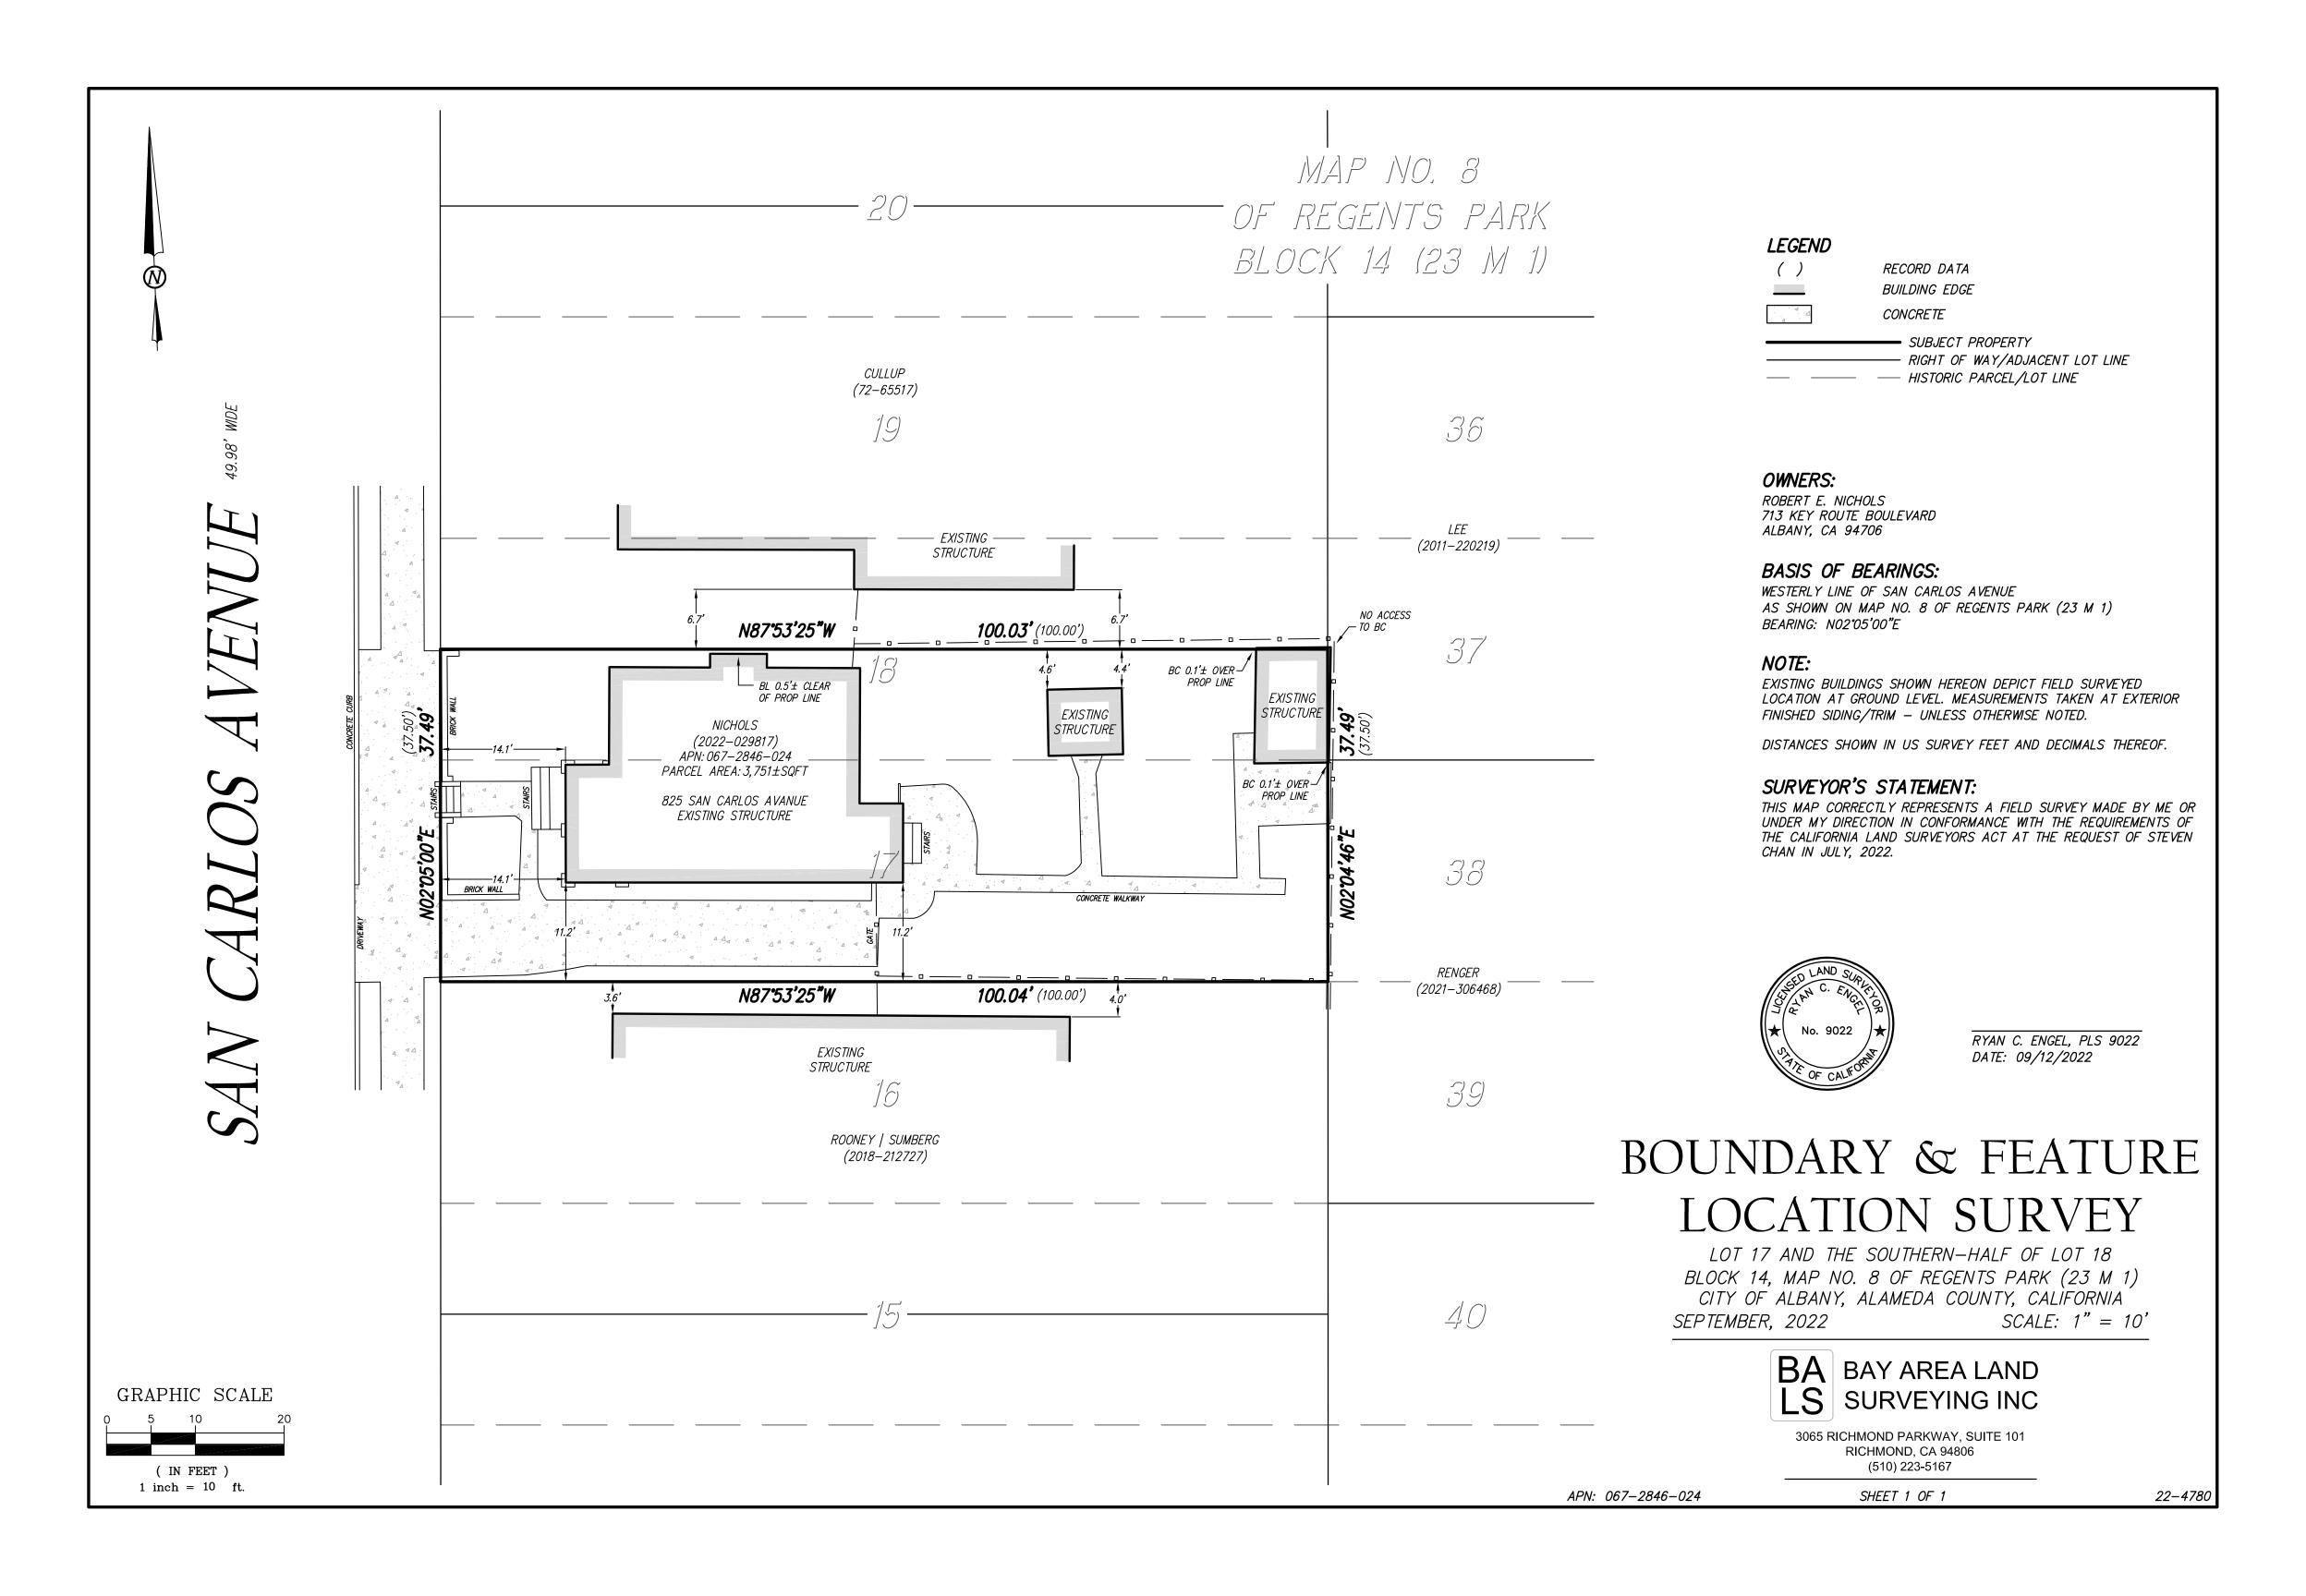



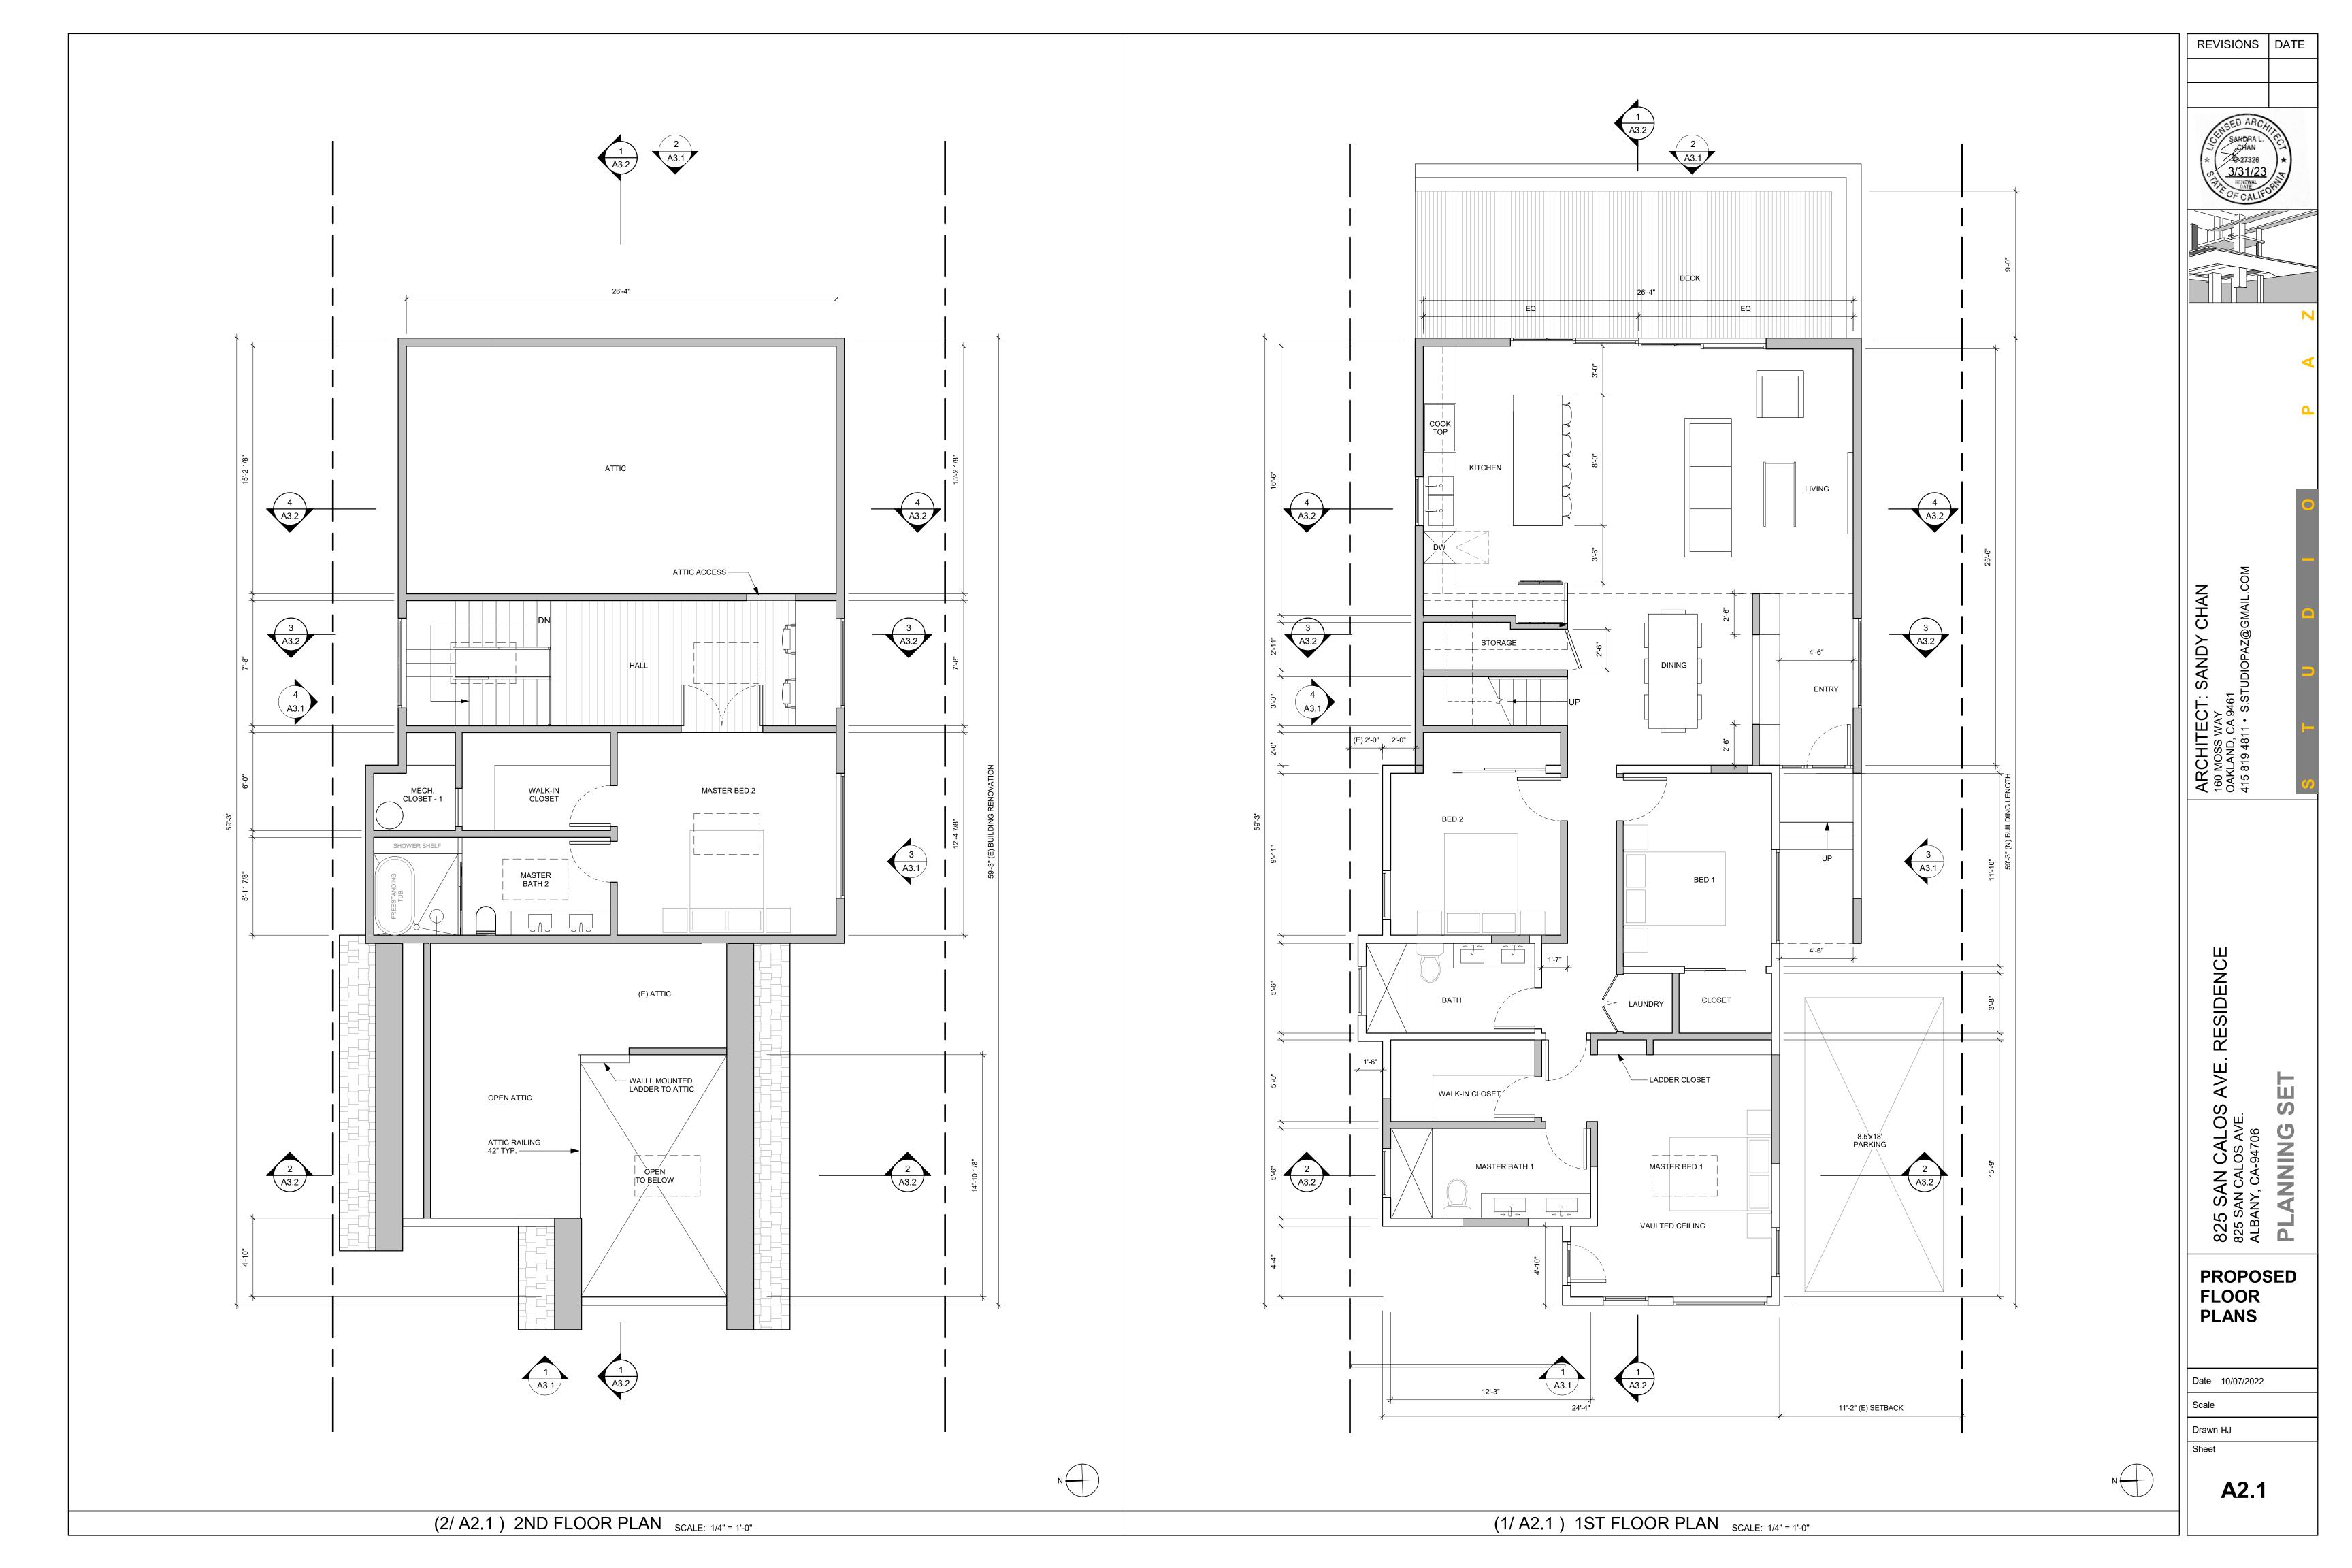


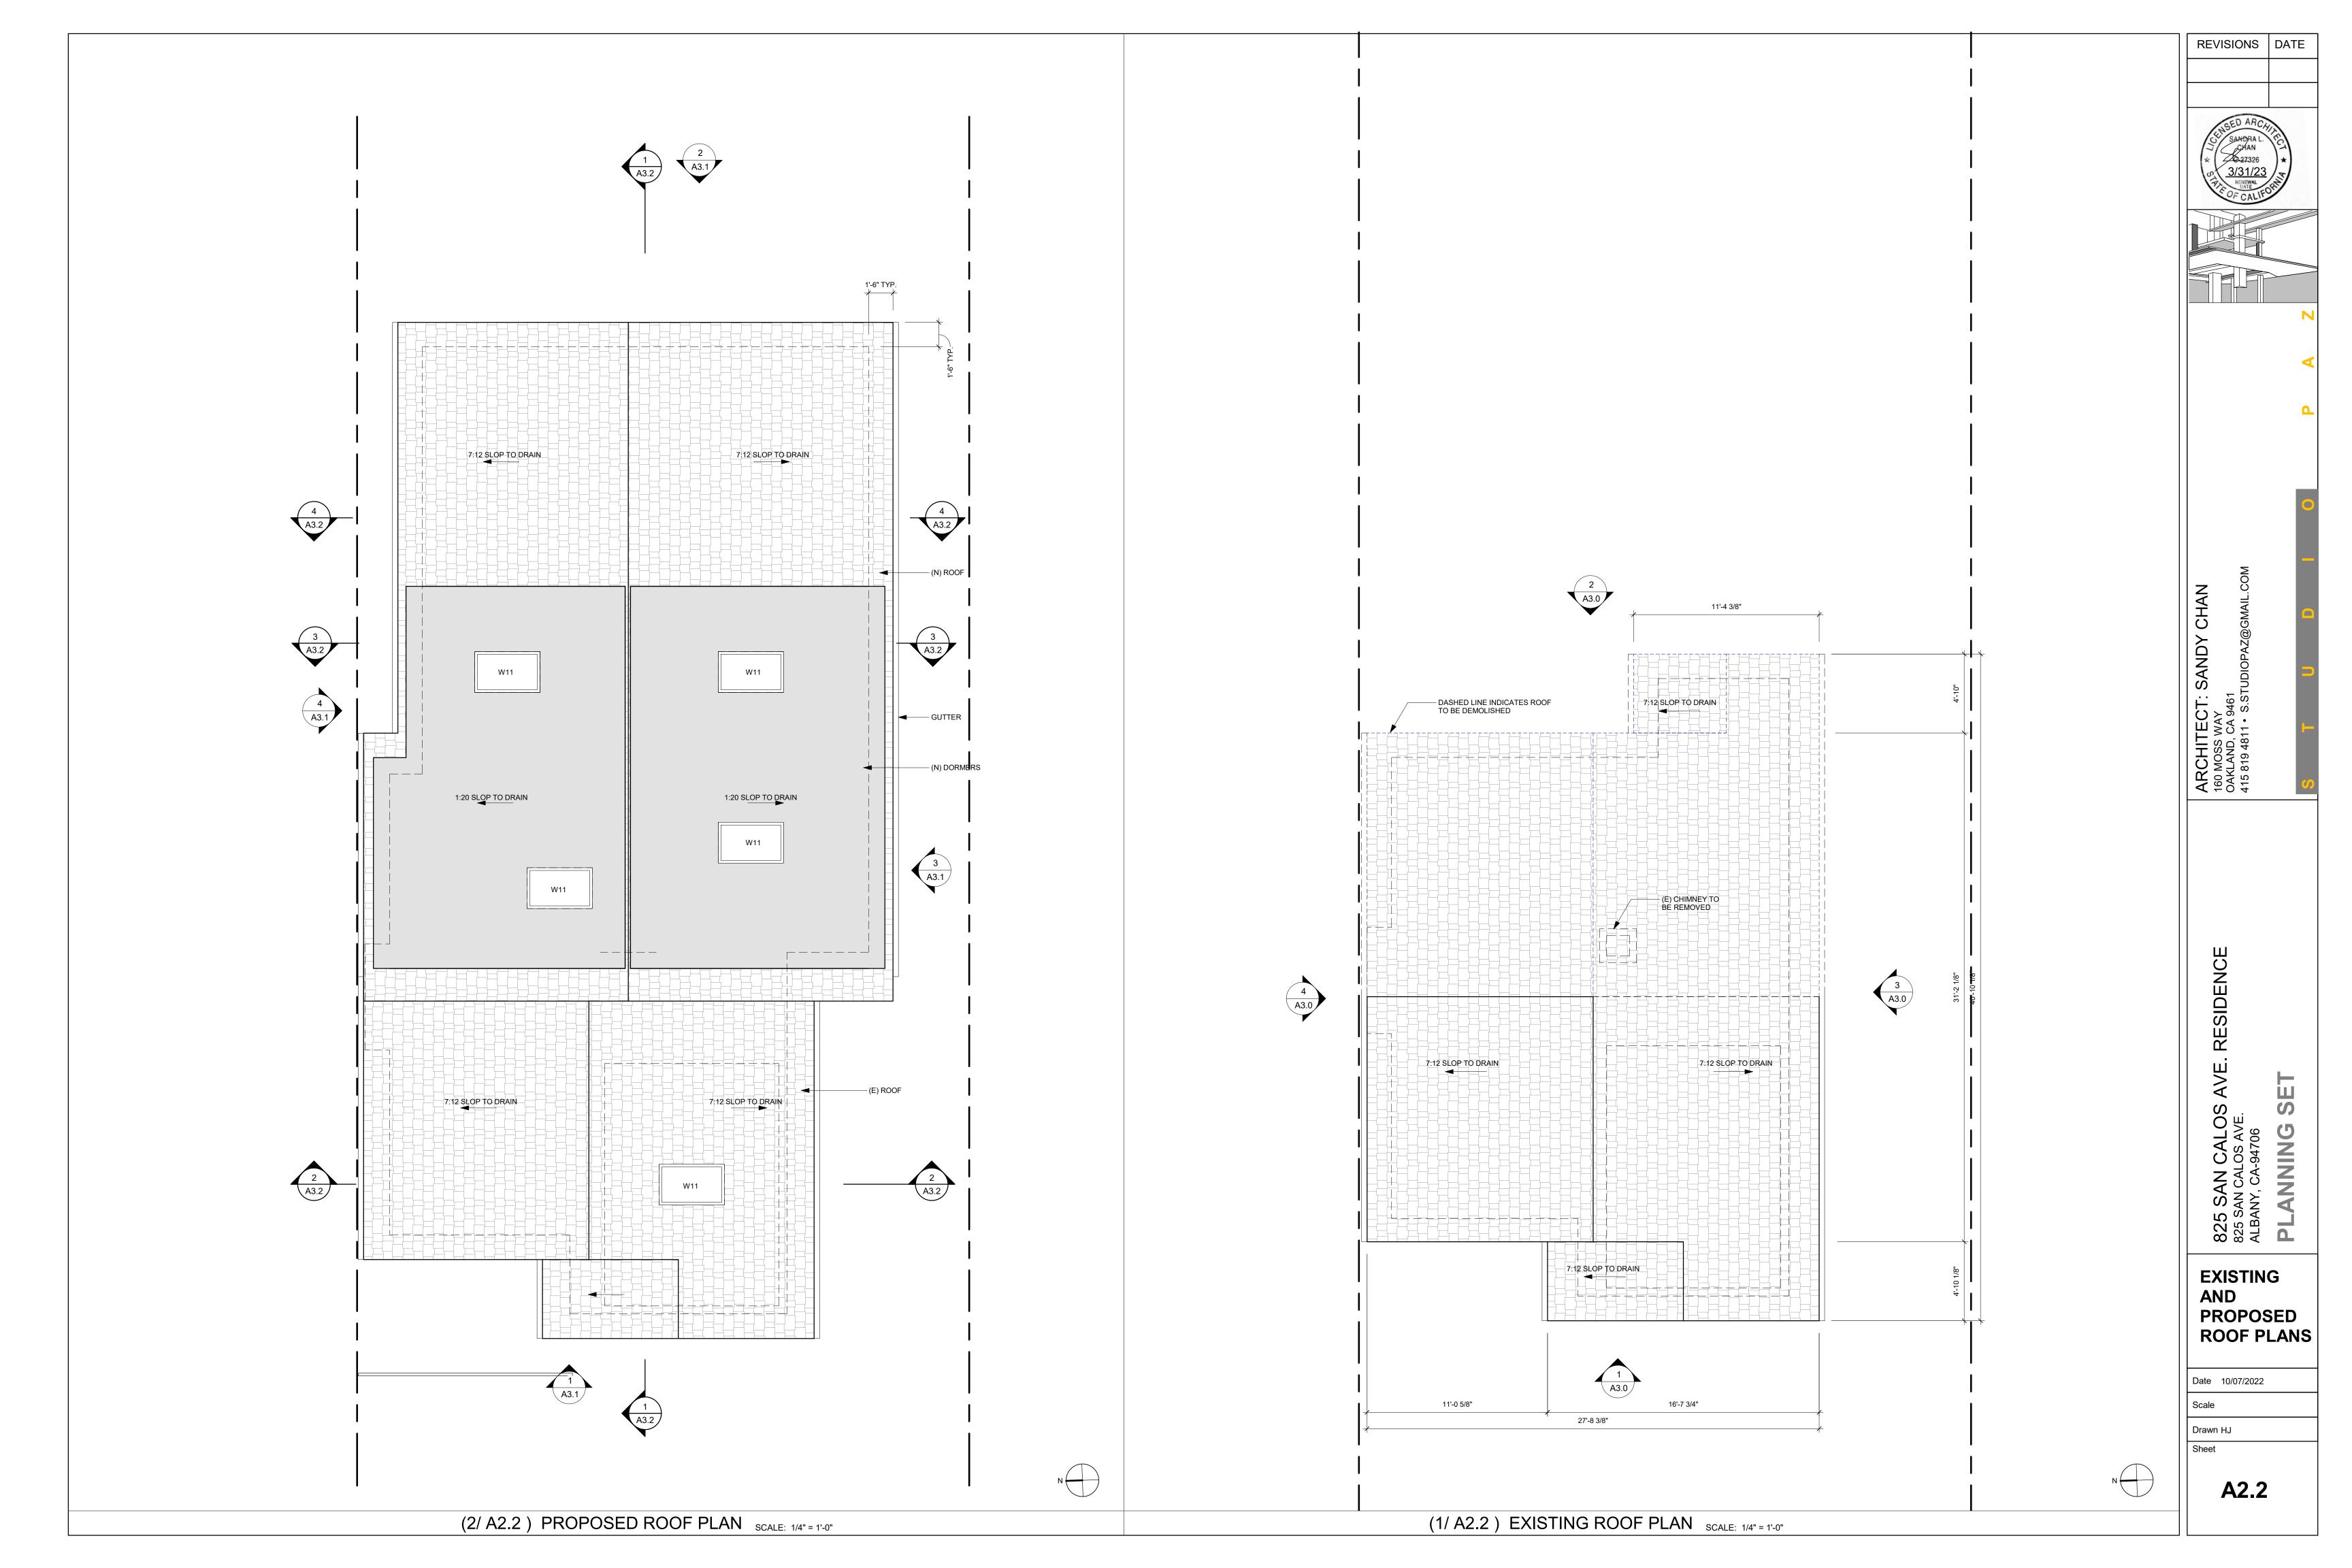


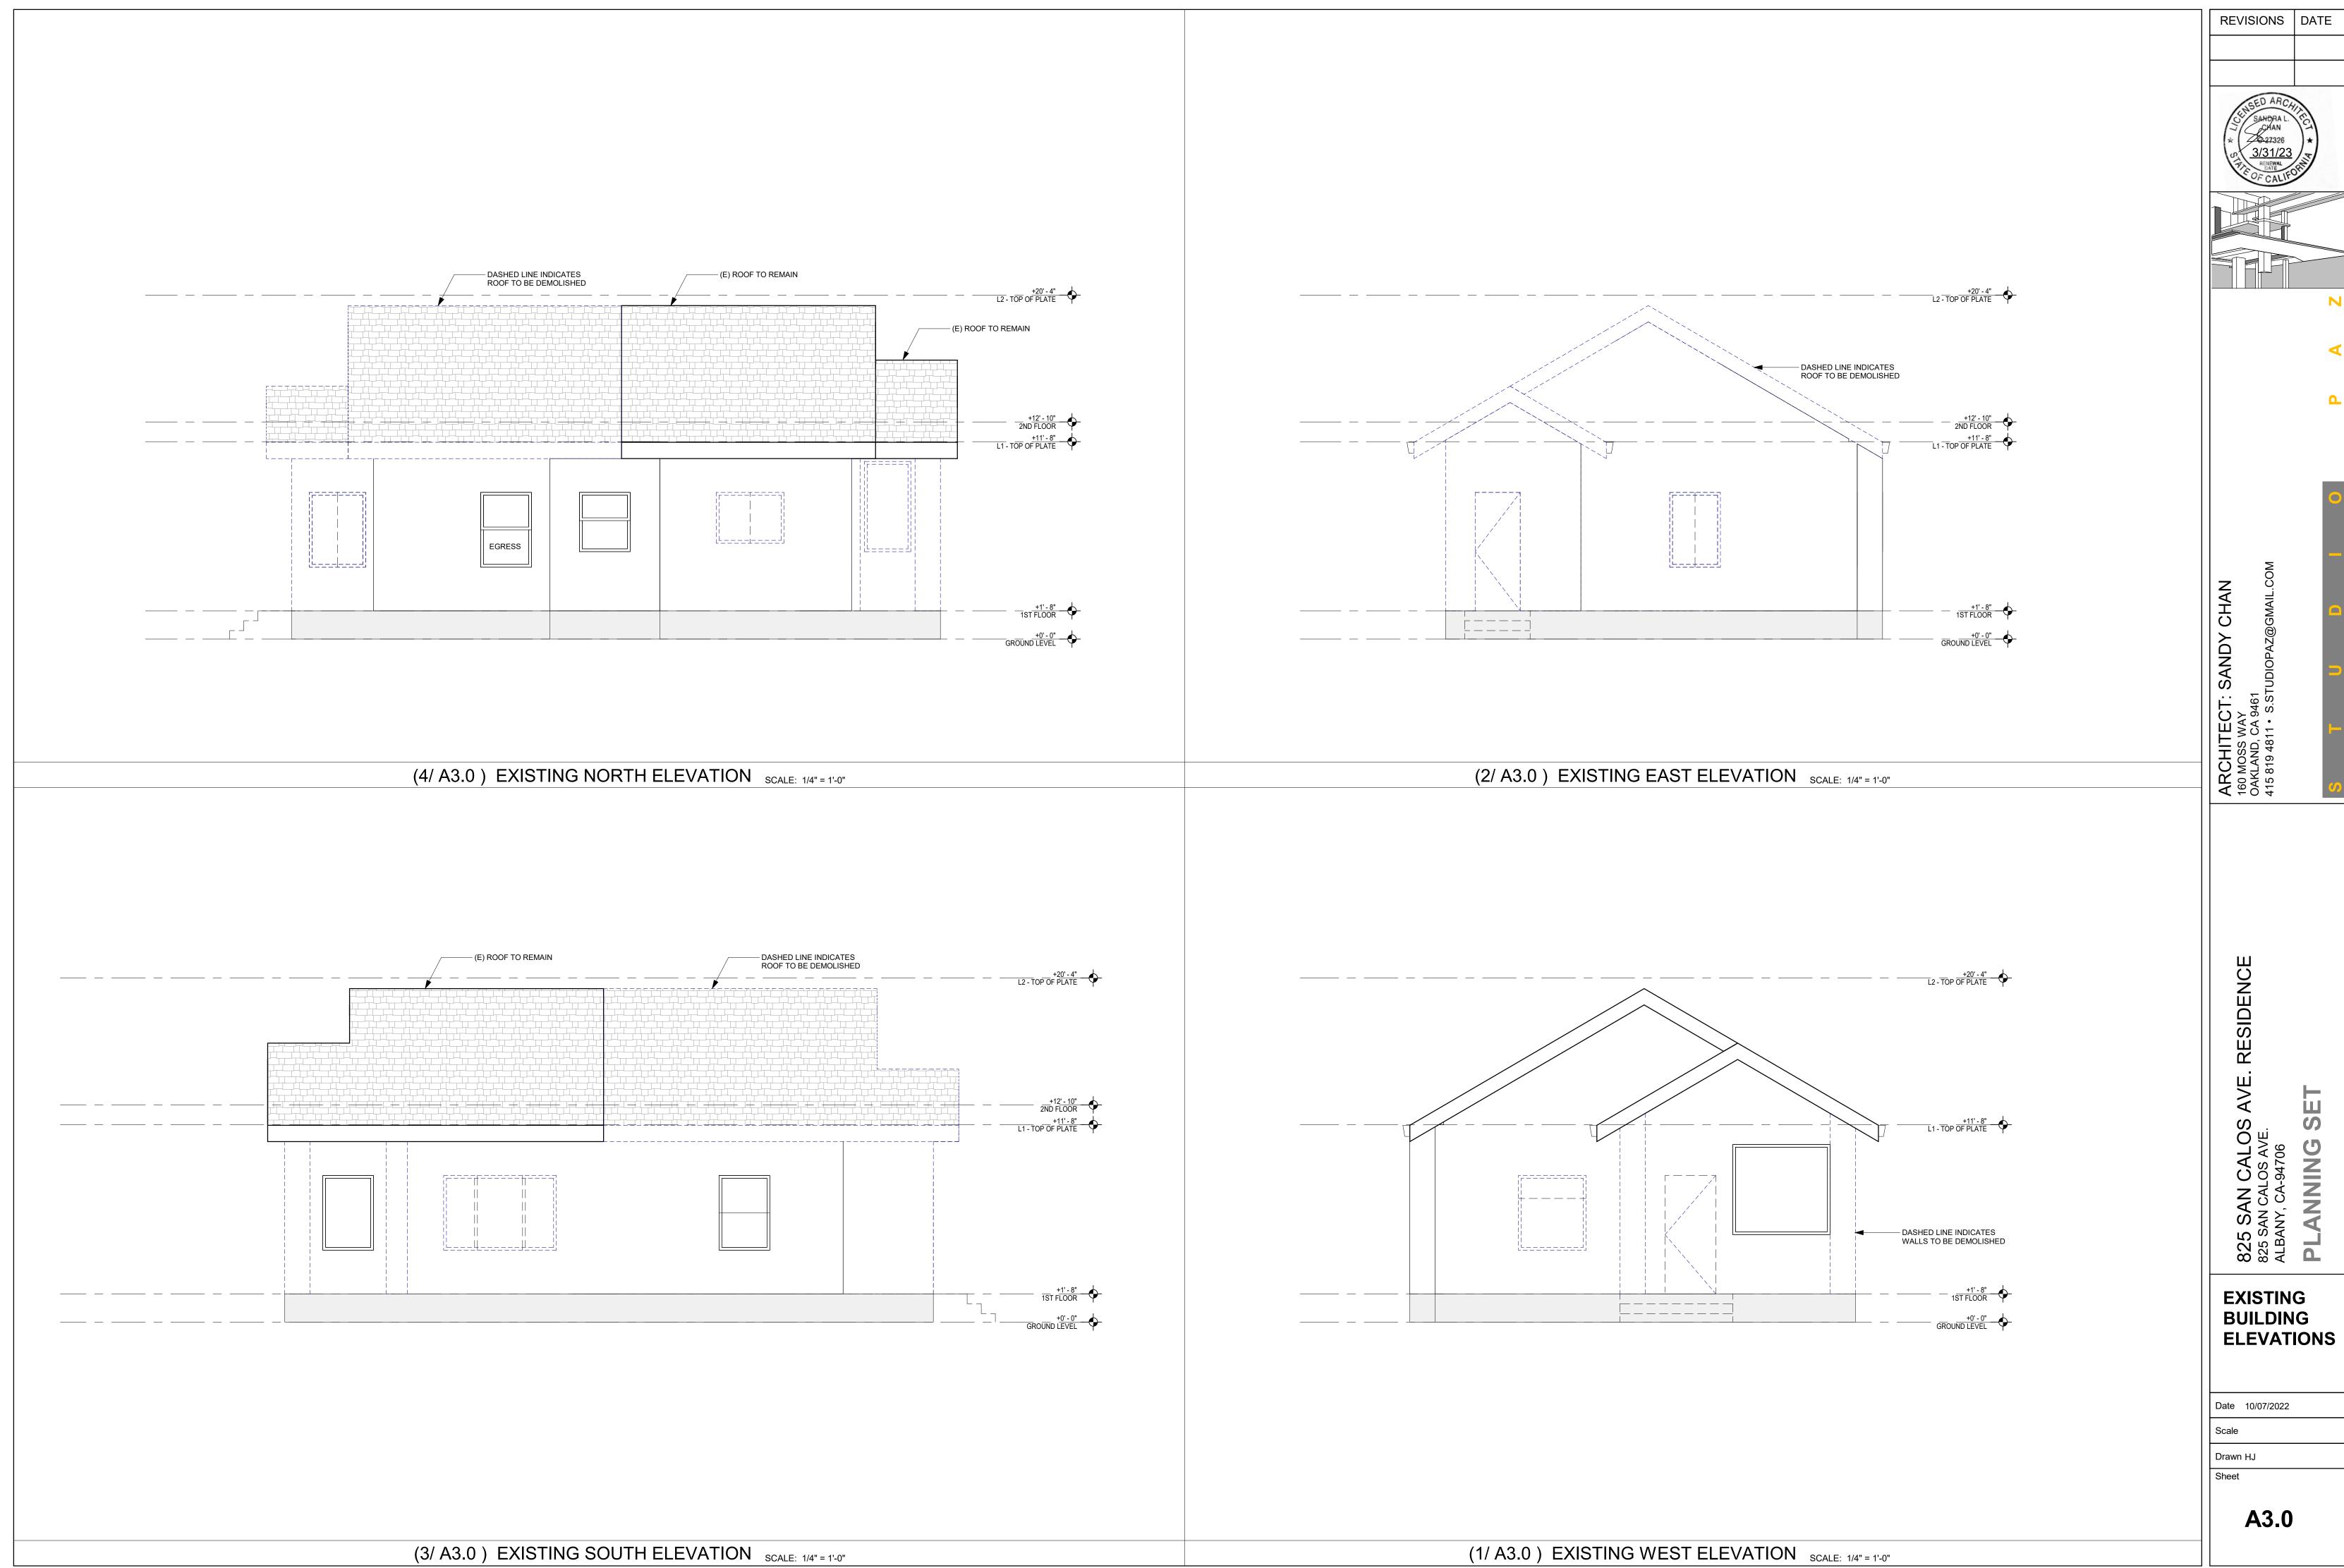



REVISIONS DATE



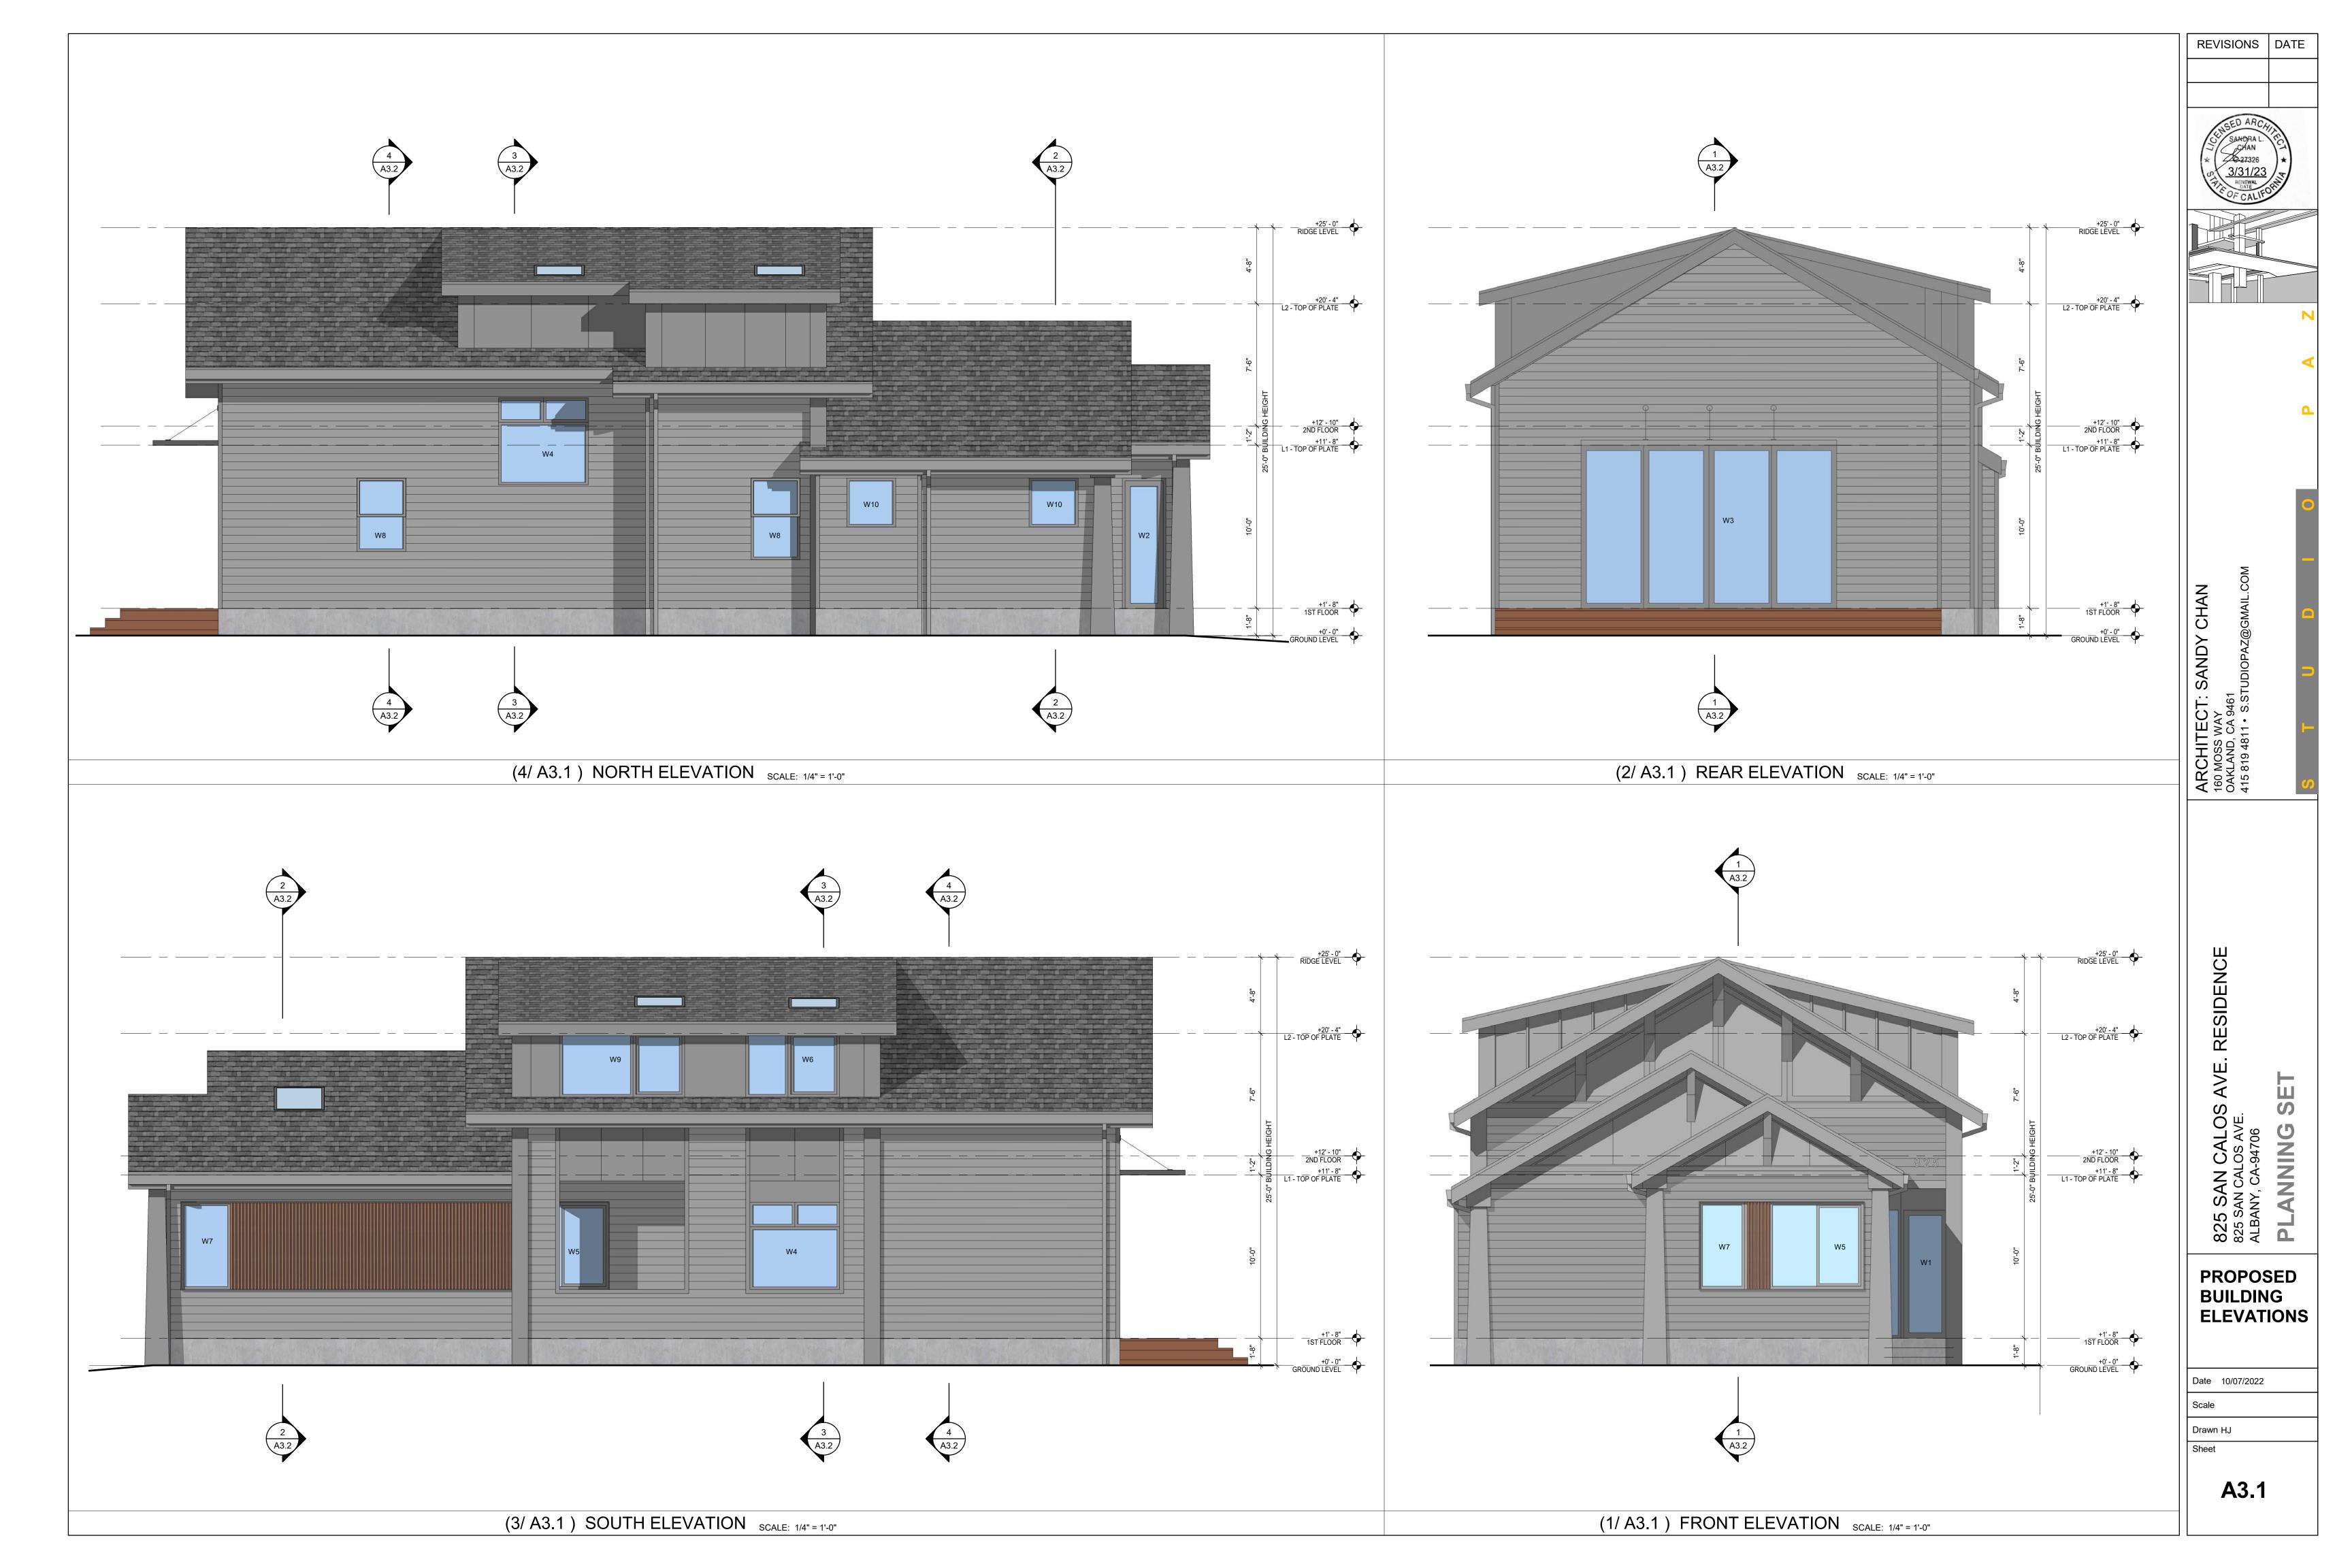


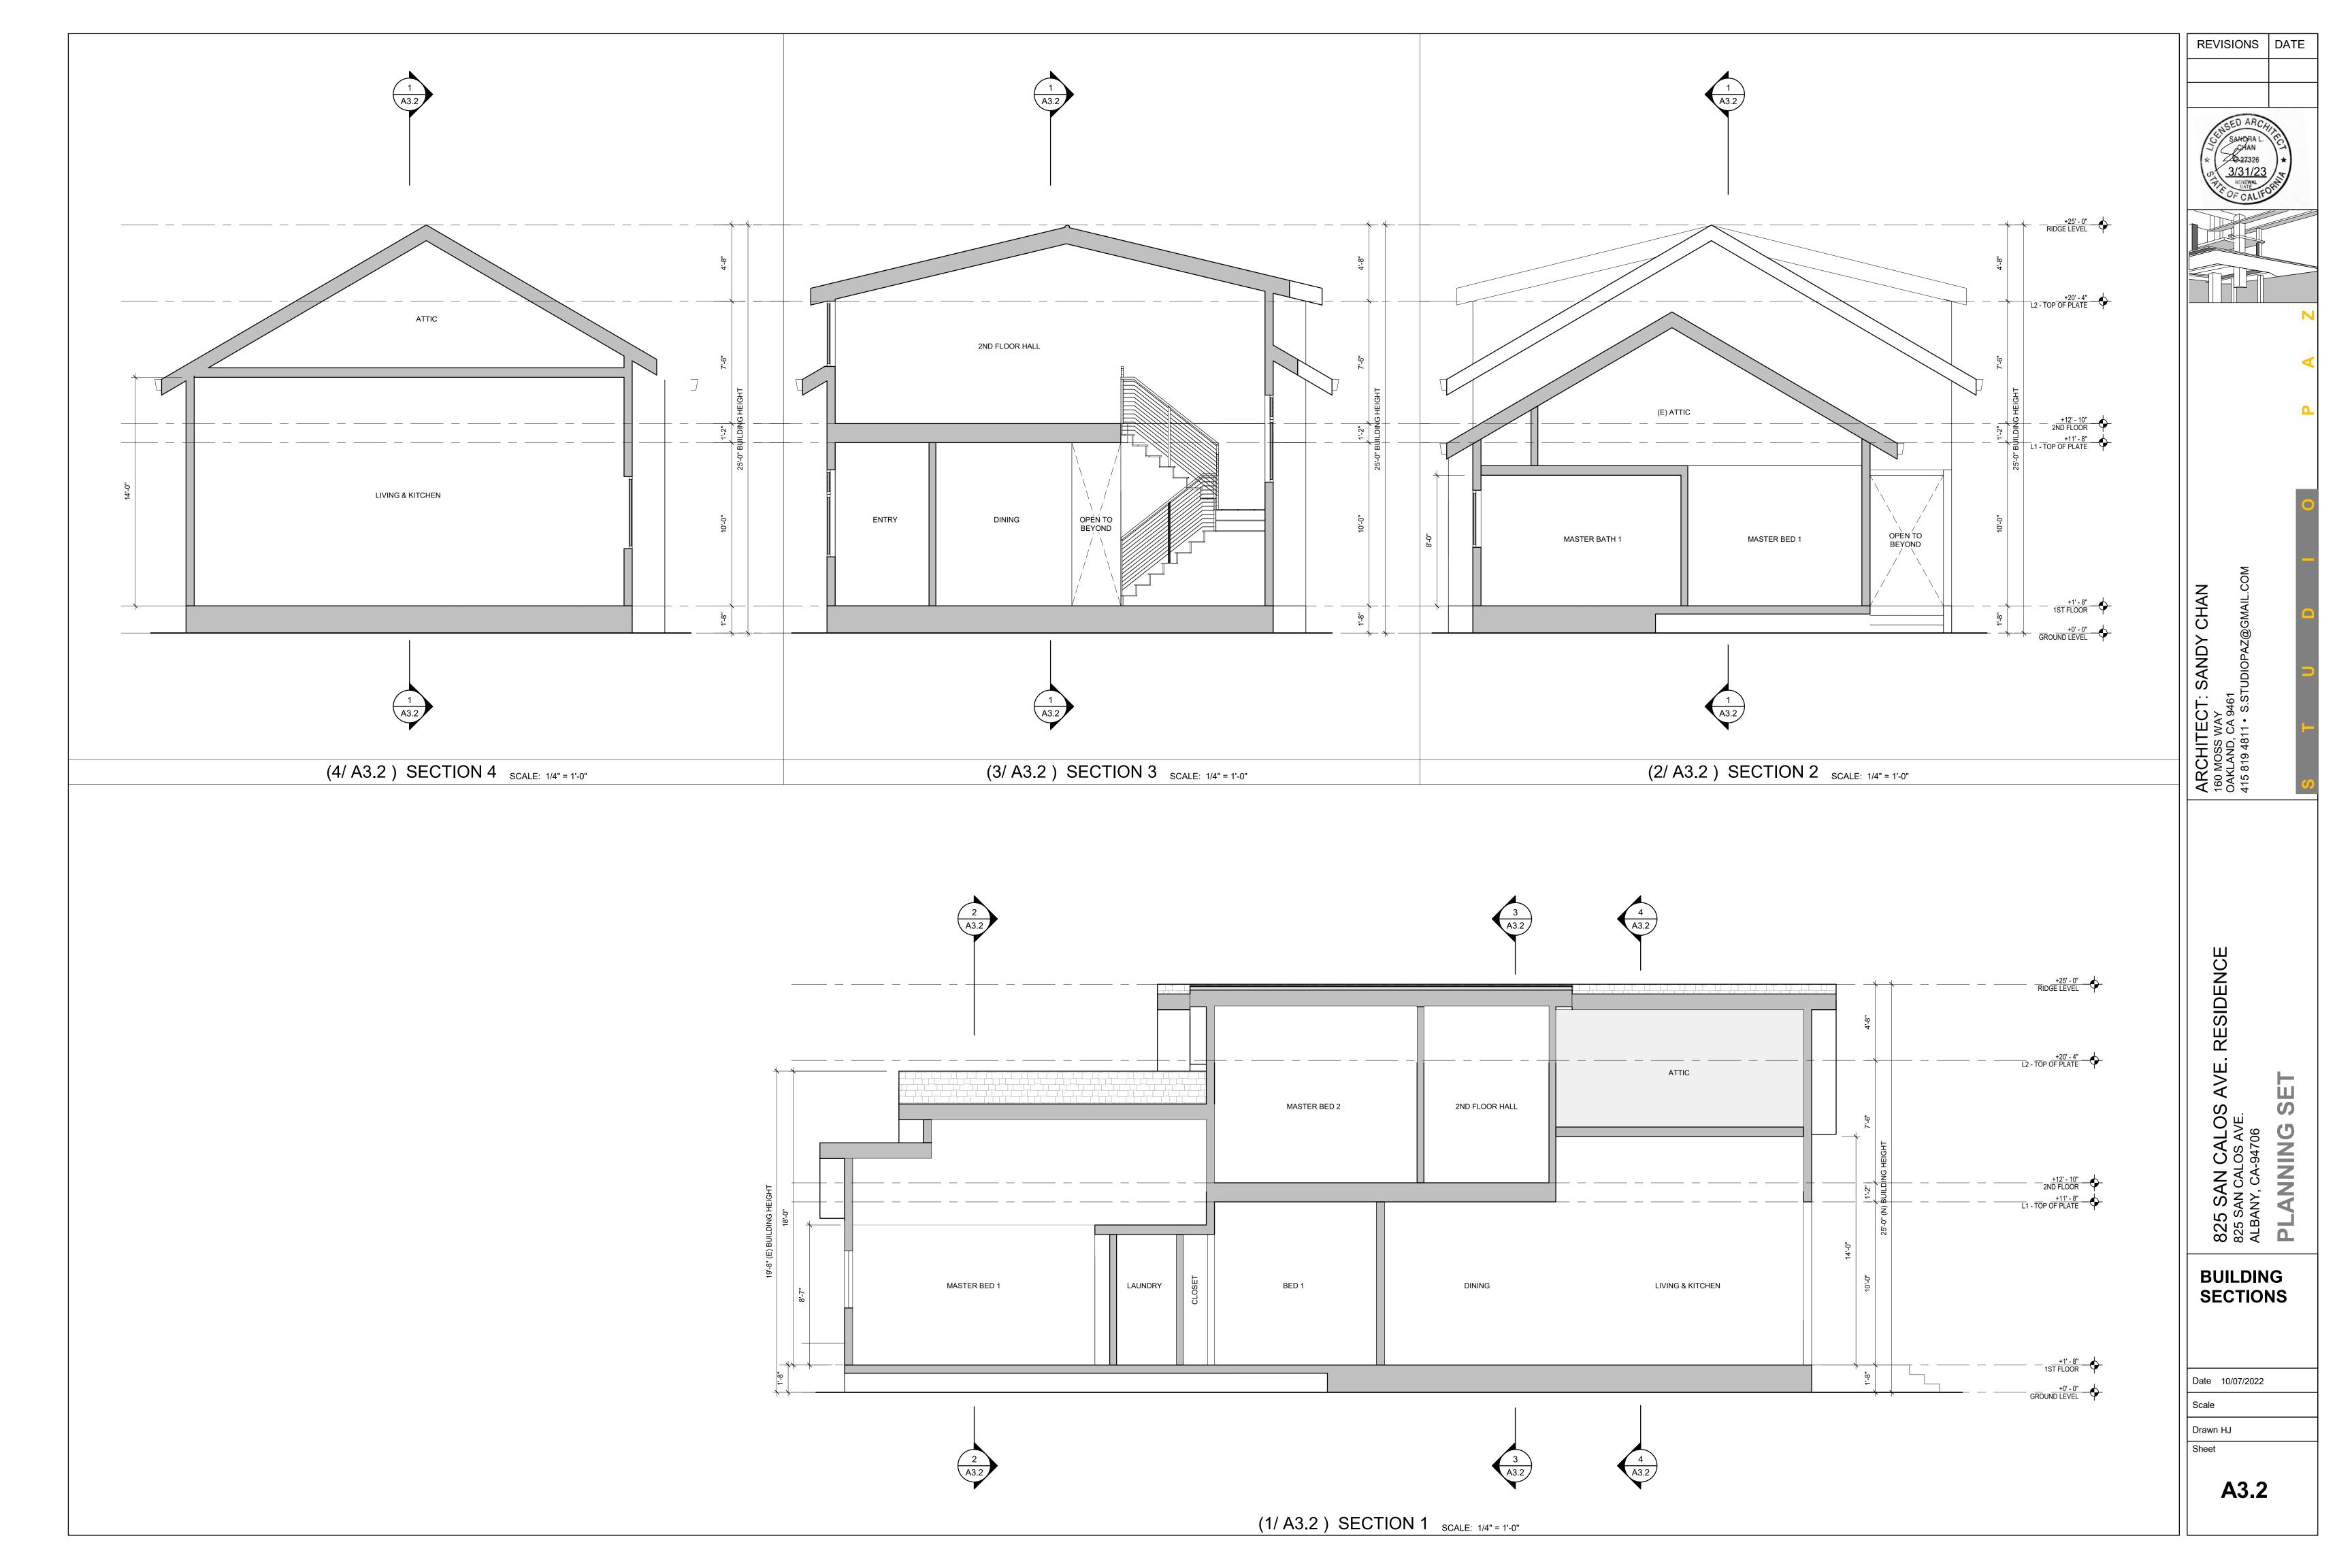

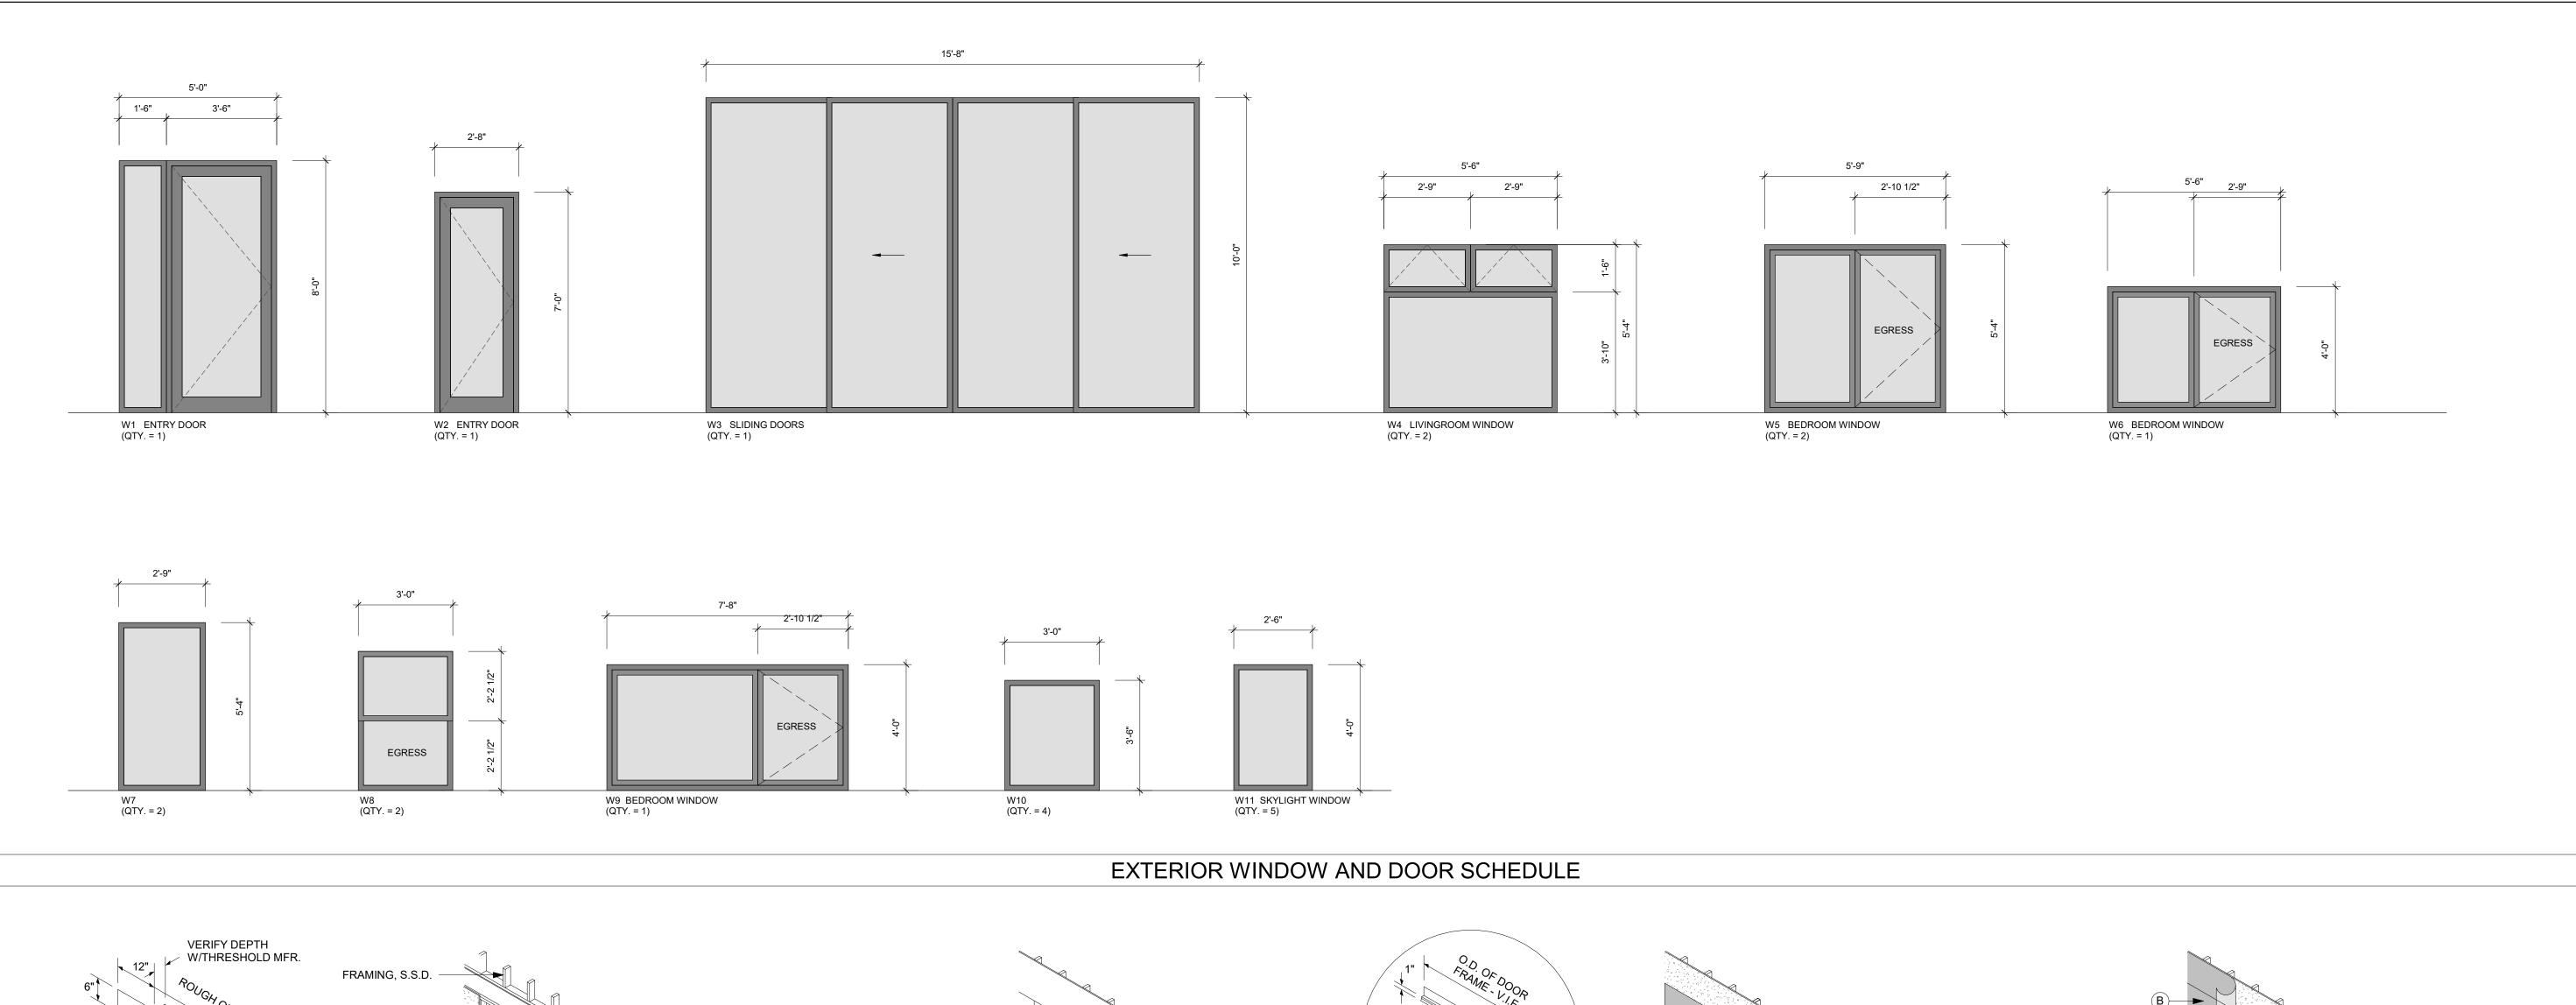

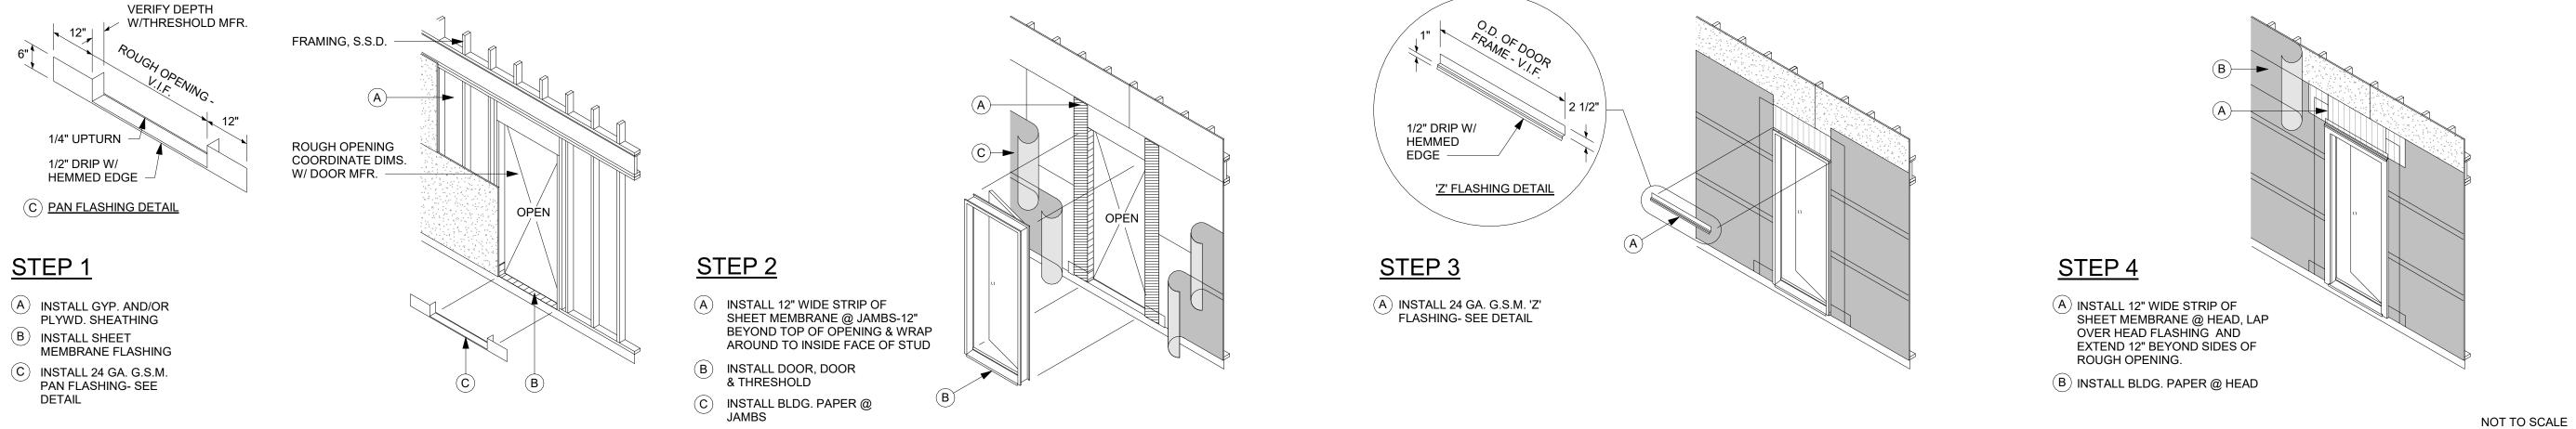



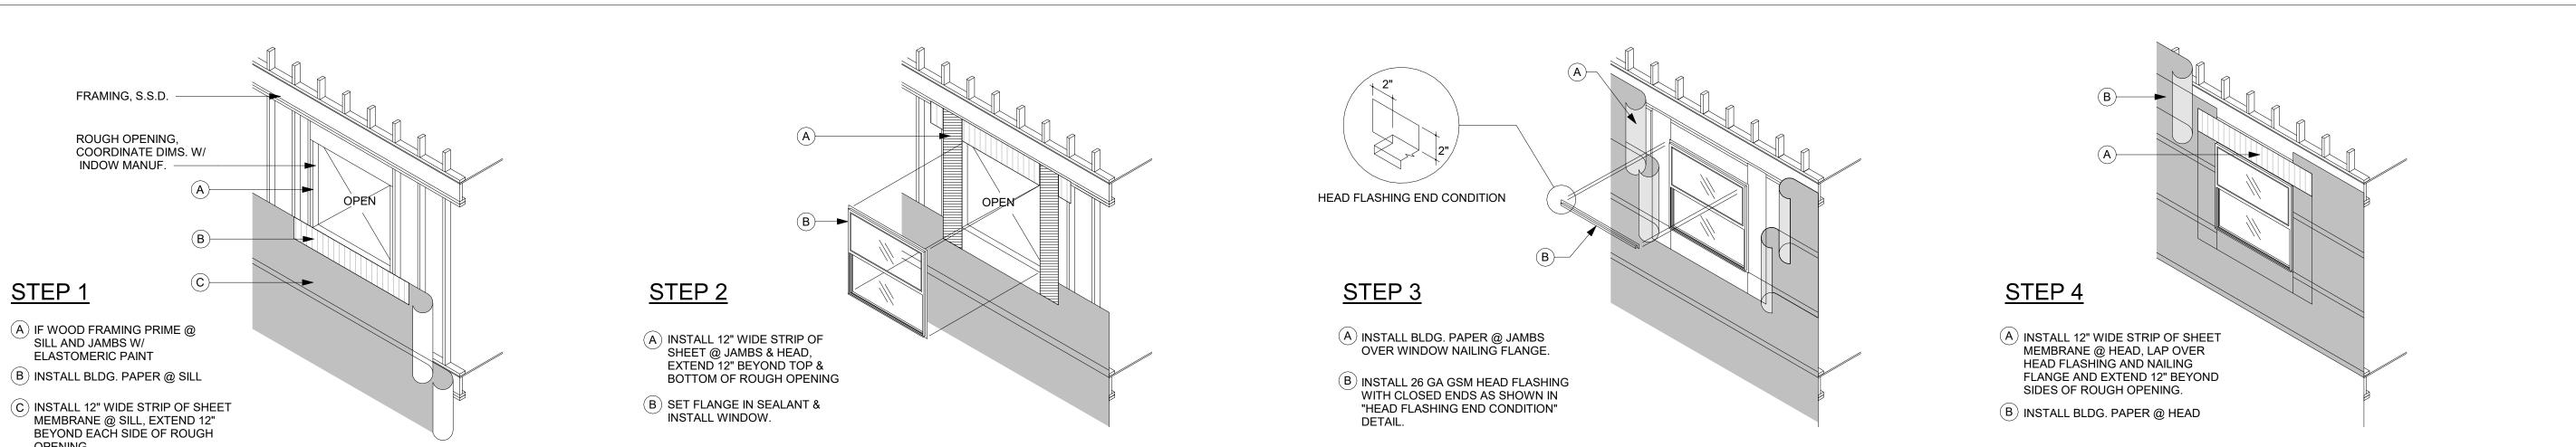

TYP. WINDOW INSTALLATION

REVISIONS DATE

ESIDENCE α CALOS LOS AVE.

ANNING

EXTERIOR WINDOW SCHEDULE AND INSTALLATION

DETAILS

Scale

Drawn HJ Sheet

NOT TO SCALE

A4.0